



Climate Control Solutions
Bard Manufacturing Company, Inc.
Bryan, Ohio 43506

A-COIL SUPPORT INSTALLATION INSTRUCTIONS

Models: CSADP2220 & CSADP2520

The coil support is designed for use with all Bard Hi-Boy & Lo-Boy top discharge oil furnaces and will provide the appropriate clearance to prevent damage to the plastic drain pan.


NOTE: If the drain pan is anything other than a steel pan, particular attention must be given to the Installation Instructions for the coil to ensure that it is acceptable for use with these oil furnaces having a maximum outlet air temperature of 200°F.

Model CSADP2220 (22" x 20" x 6") is for use with all Bard Hi-Boy and Lo-Boy top discharge oil furnaces except for 130,000 BTUH and 140,000 BTUH models.

Model CSADP2520 (25" x 20" x 6") is for use only with 130,000 BTUH and 140,000 BTUH Bard Hi-Boy and Lo-Boy top discharge oil furnaces.

The coil support is shipped completely assembled and ready for installation. Make sure to use the correctly sized support for the furnace being installed. Place the coil support over the furnace discharge opening with the gaskets facing down. There is no need to secure it to the furnace since the weight of the A-Coil will keep it in place. Next, place the coil on the support and secure per the manufacturer's installation instructions.

Figure

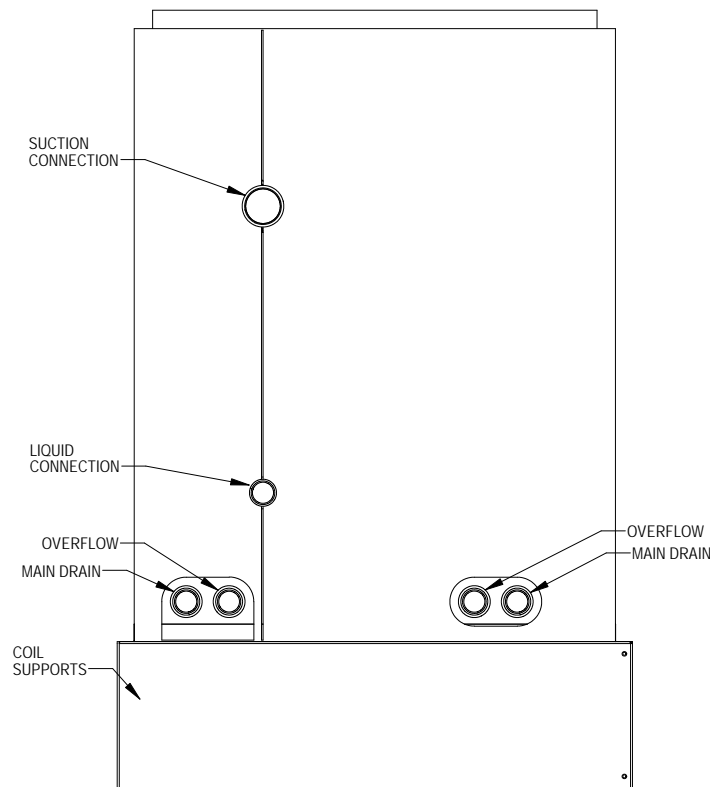

MIS-3134