


⚠ Capacitor provides off-cycle crankcase heat.

⚠ For 208V operation move this wire to 208V transformer tap.

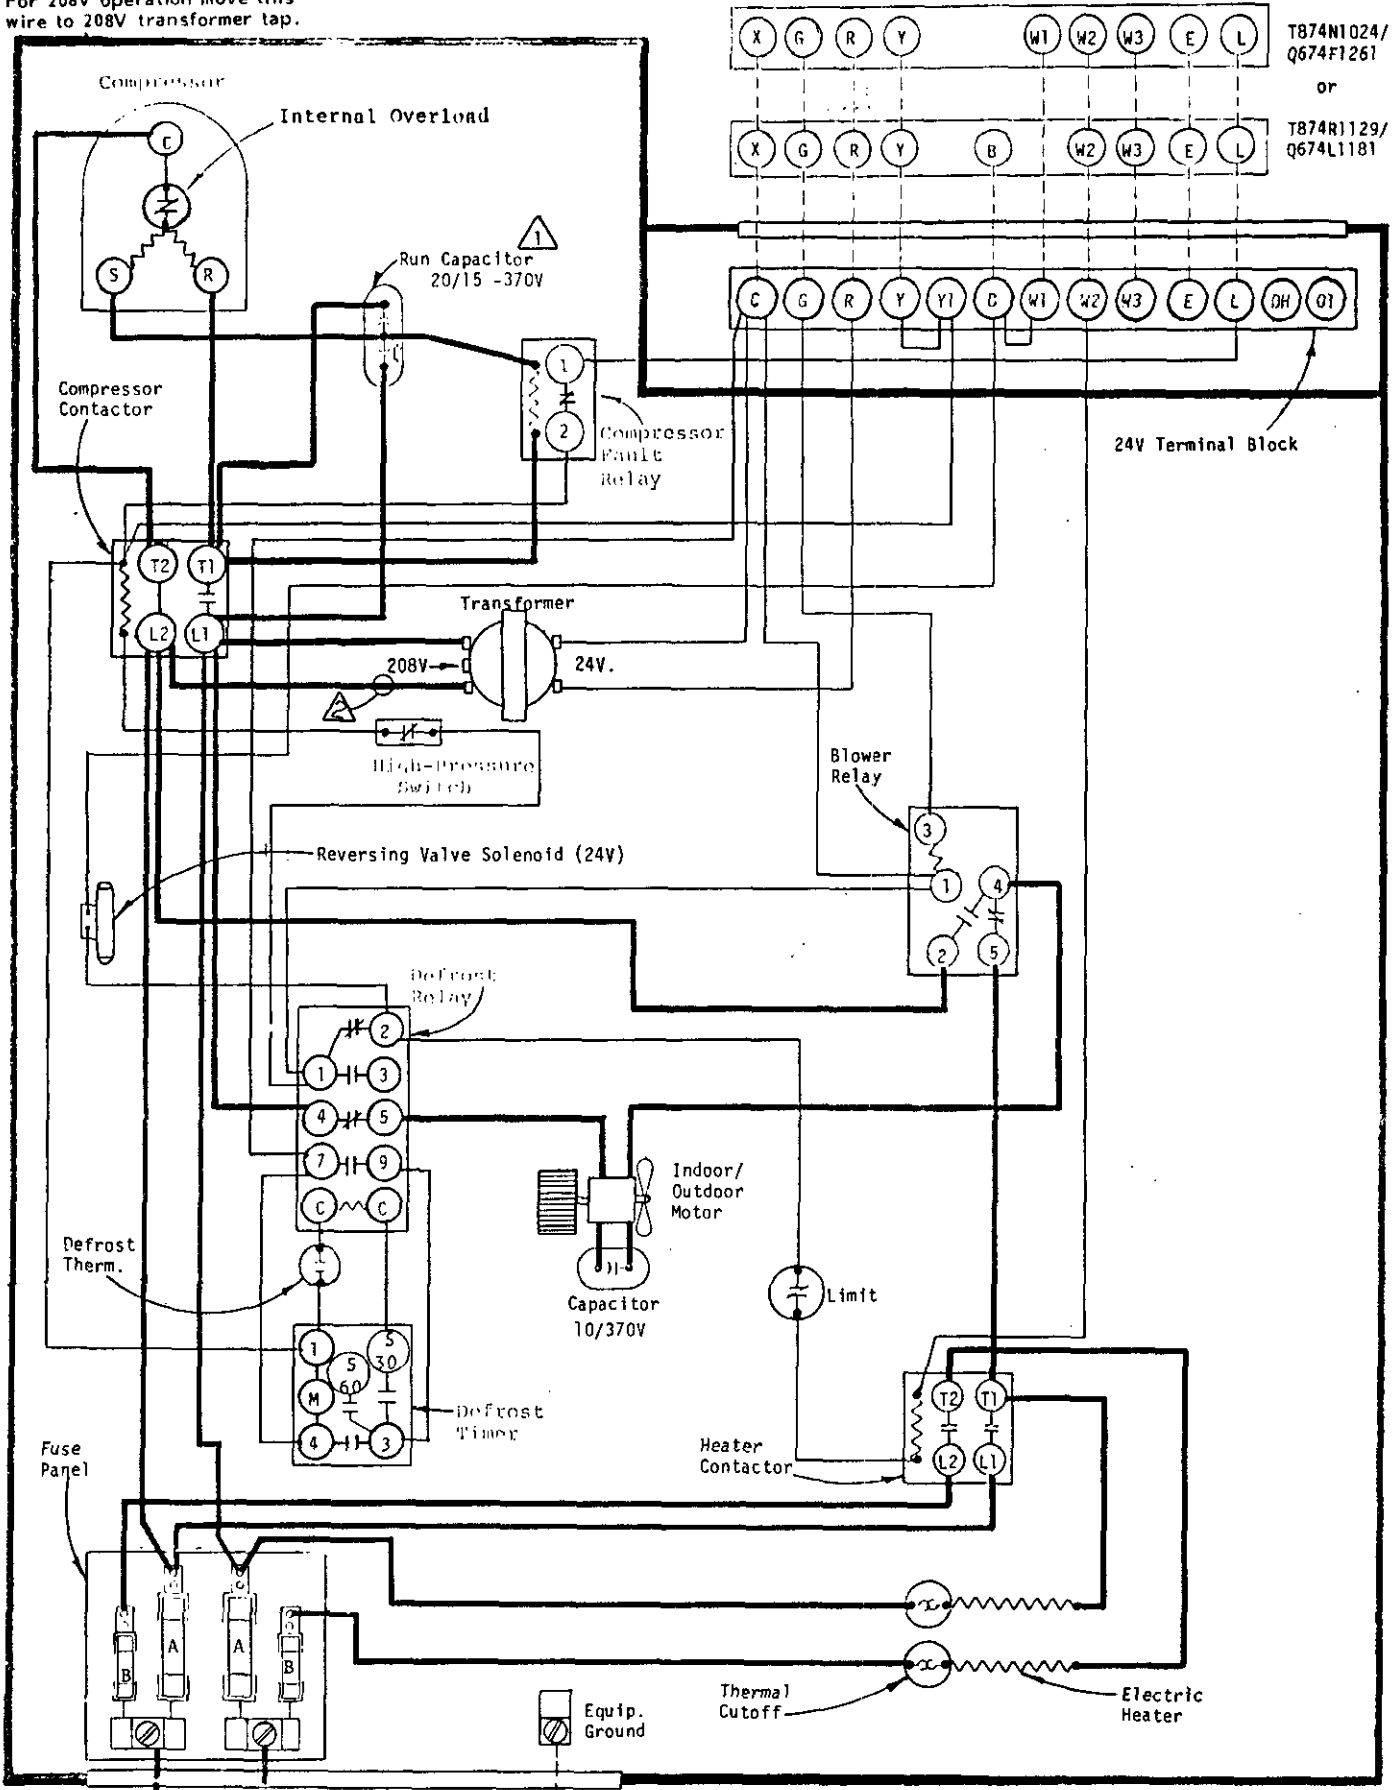

230/208-60-1

USE COPPER OR ALUMINUM WIRE

FACTORY WIRING	FIELD WIRING
Low Voltage ———	-----
High Voltage ———	-----

Fuse A - 60A Time Delay  
 Fuse B - 30A Standard

MODEL PH24-2 w/10Kw

4003-130T