


⚠ Capacitor provides off-cycle crankcase heat.
 ⚠ For 208V operation move this wire to 208V transformer tap.

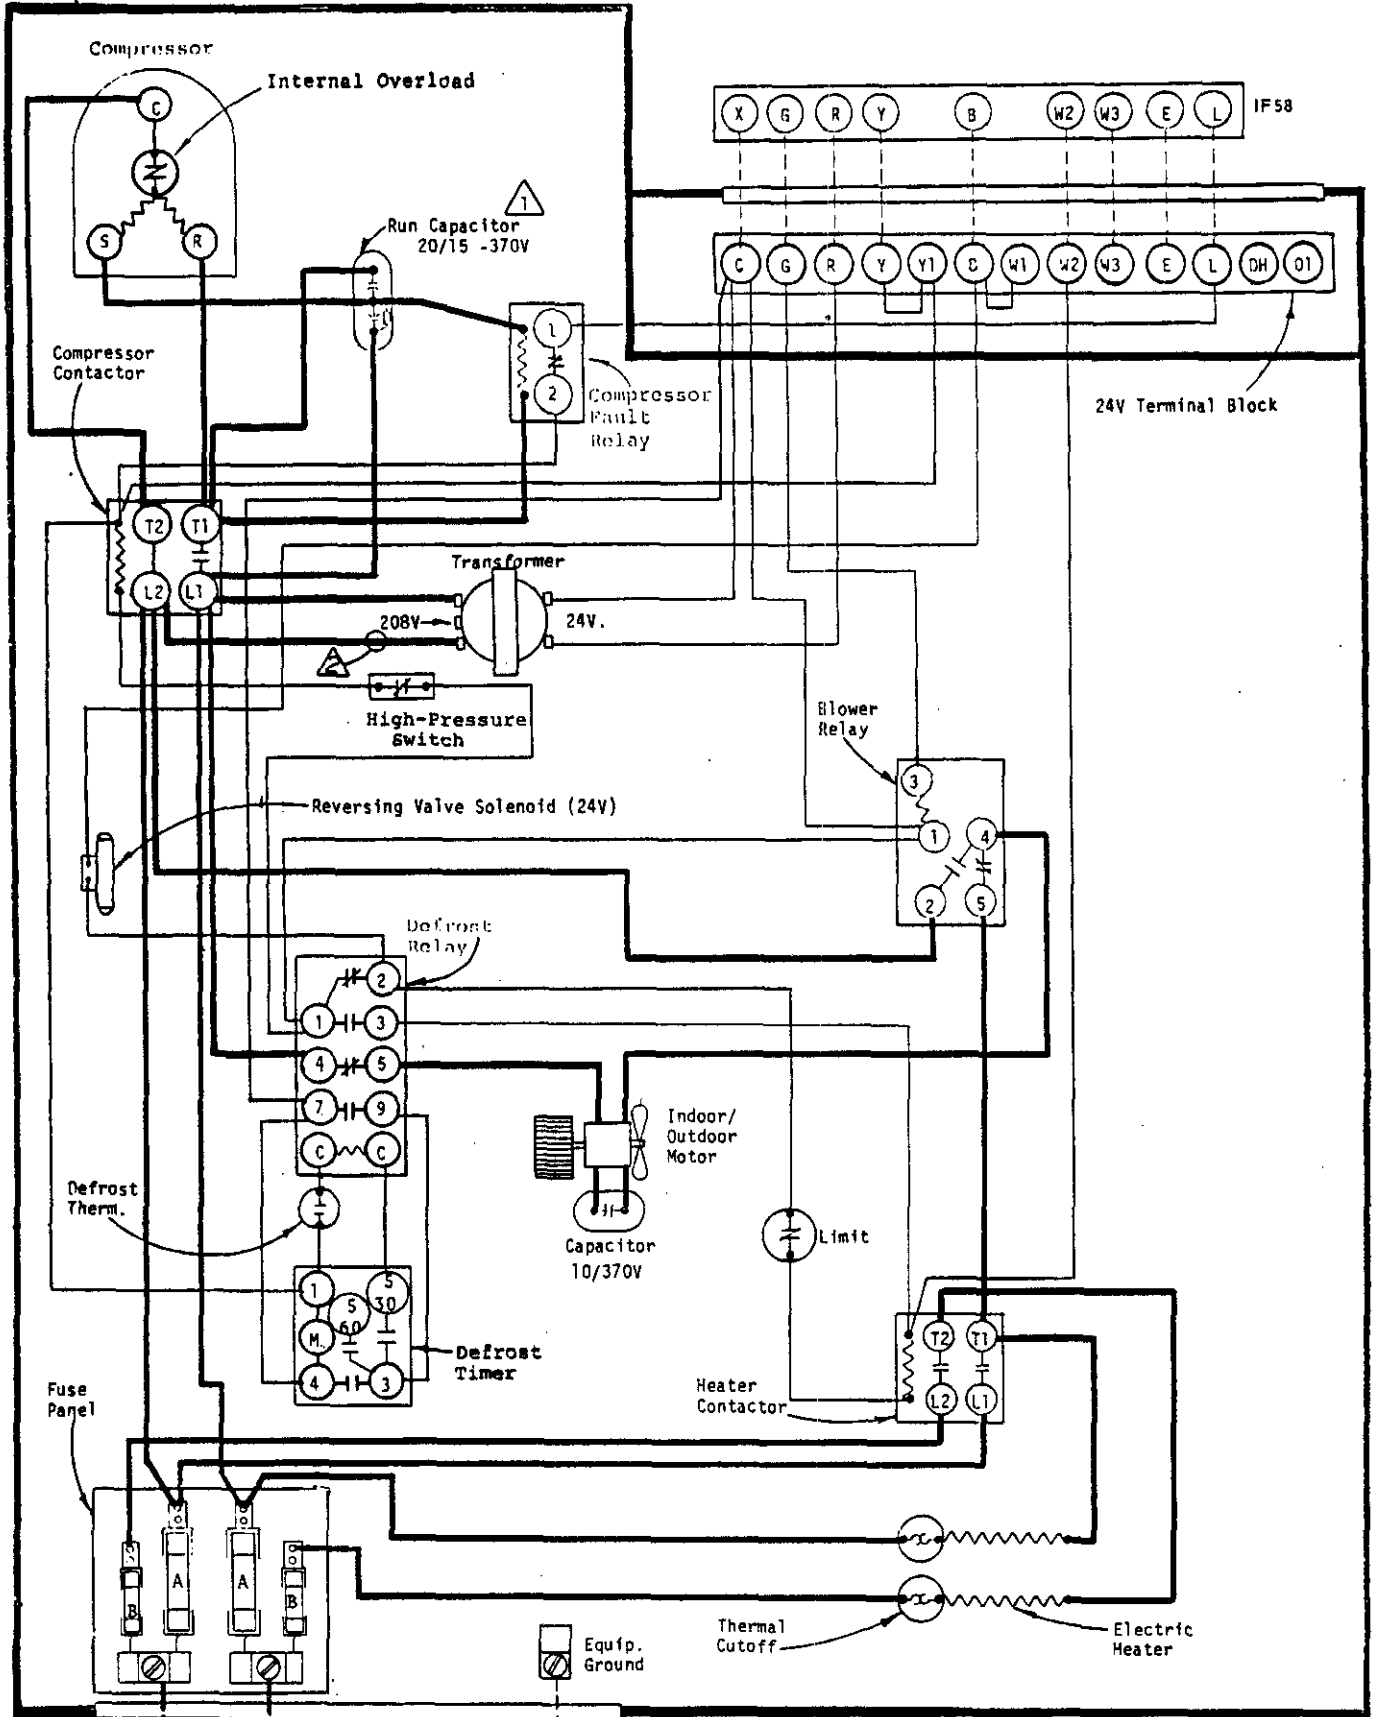

230/208-60-1

USE COPPER OR ALUMINUM WIRE

FACTORY WIRING	FIELD WIRING
Low Voltage ———	-----
High Voltage ———	-----

Fuse A - 60A Time Delay
 Fuse B - 30A Standard

2 TON
 w/10KW

4003-131A