

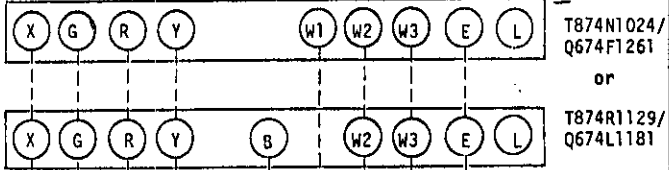


⚠ Capacitor provides off-cycle crankcase heat.

⚠ For 208V operation move this wire to 208V transformer tap.

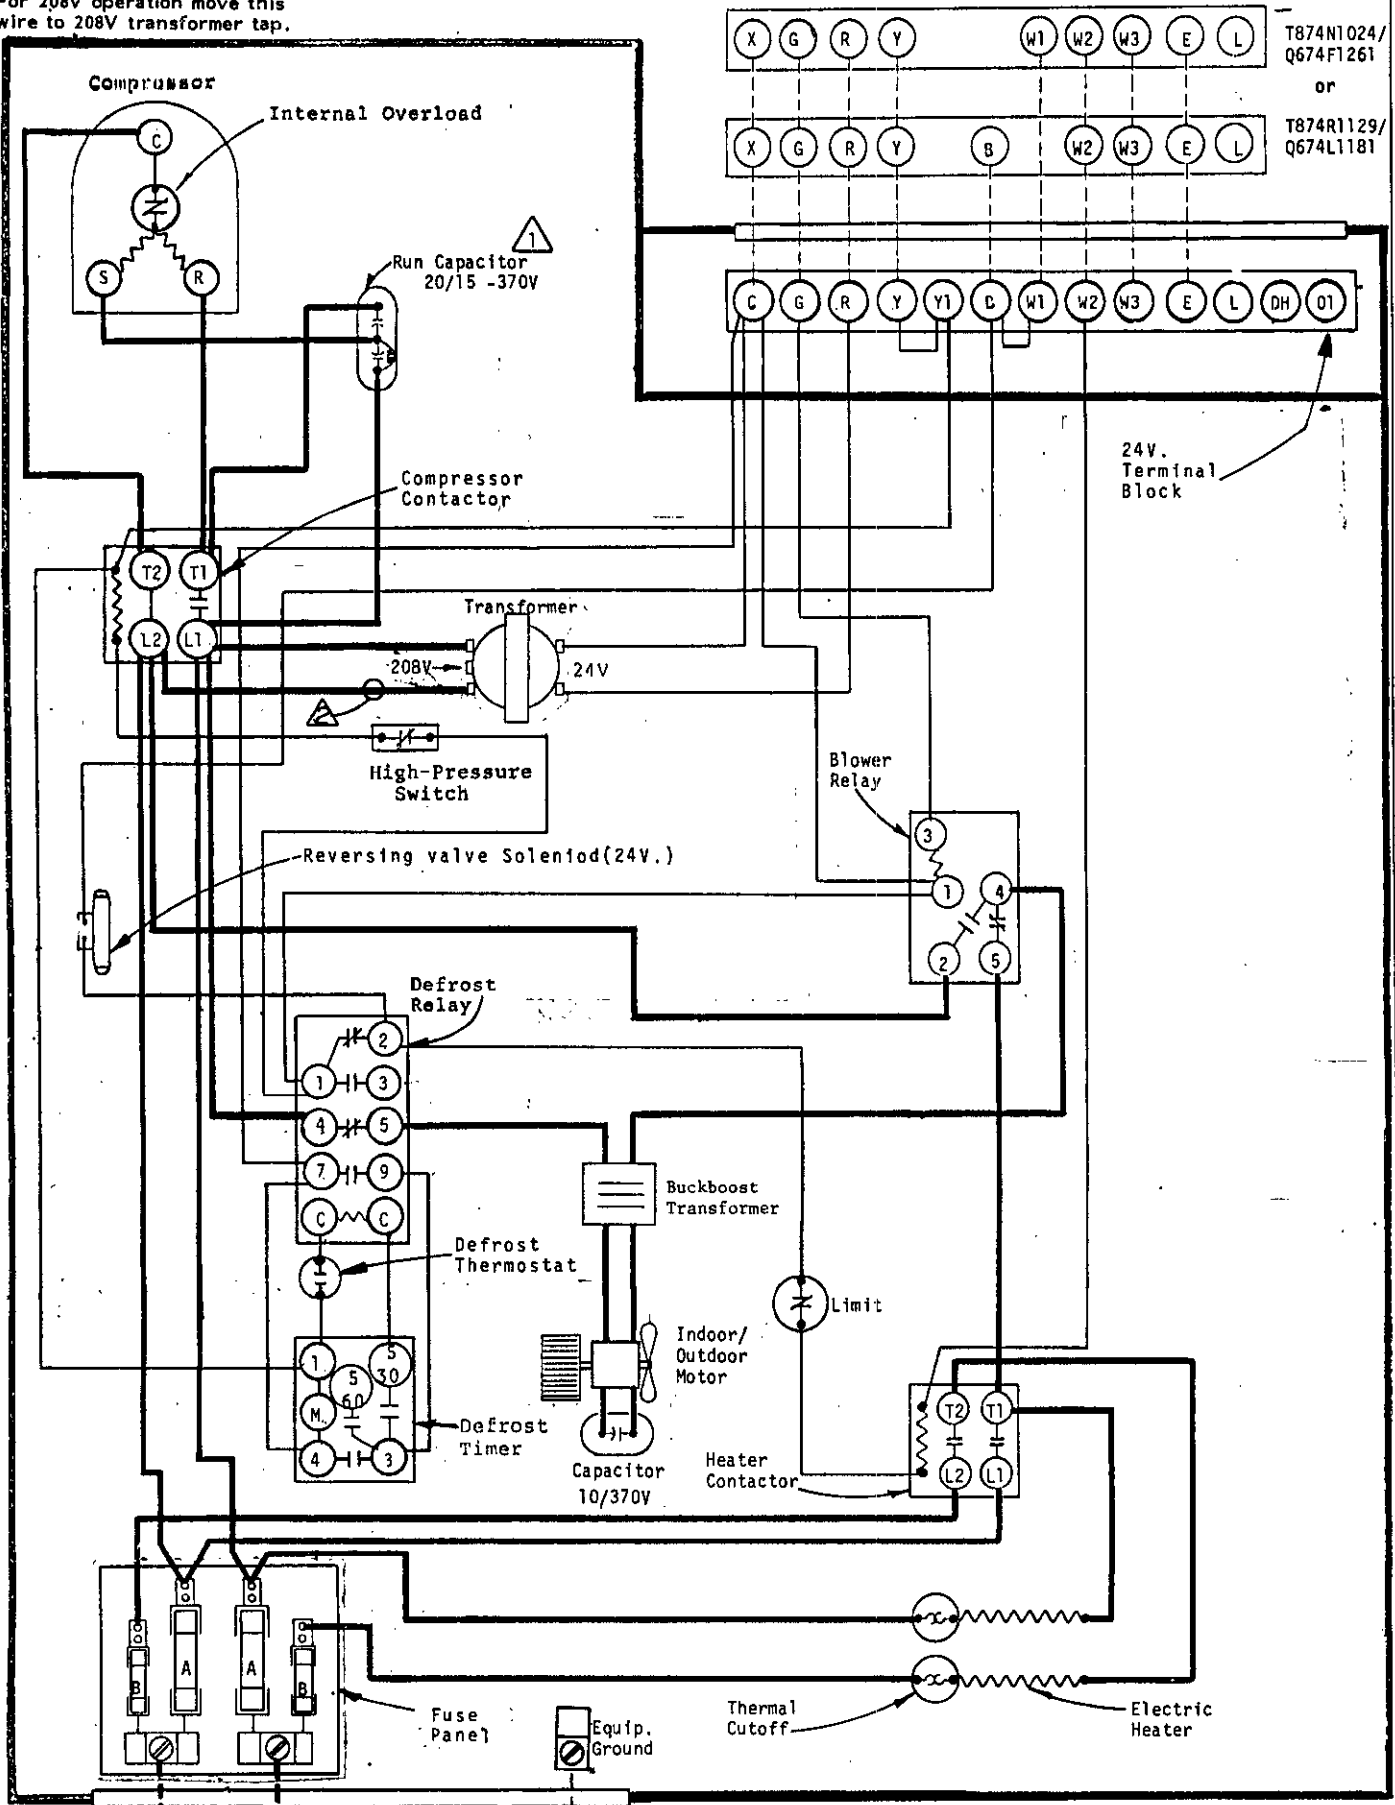

24V. Terminal Block

240/220-50-1 Fuse disconnect switch
 Fuse A-60A Time Delay
 Fuse B-30A Standard
 use copper or aluminum wire

FACTORY WIRING	FIELD WIRING
Low Voltage ———	-----
High Voltage ———	-----

MODEL PH24-2 w/ 8 Kw

4003-430I