


⚠ Capacitor provides off-cycle crankcase heat.

⚠ For 208V operation move this wire to 208V transformer tap.

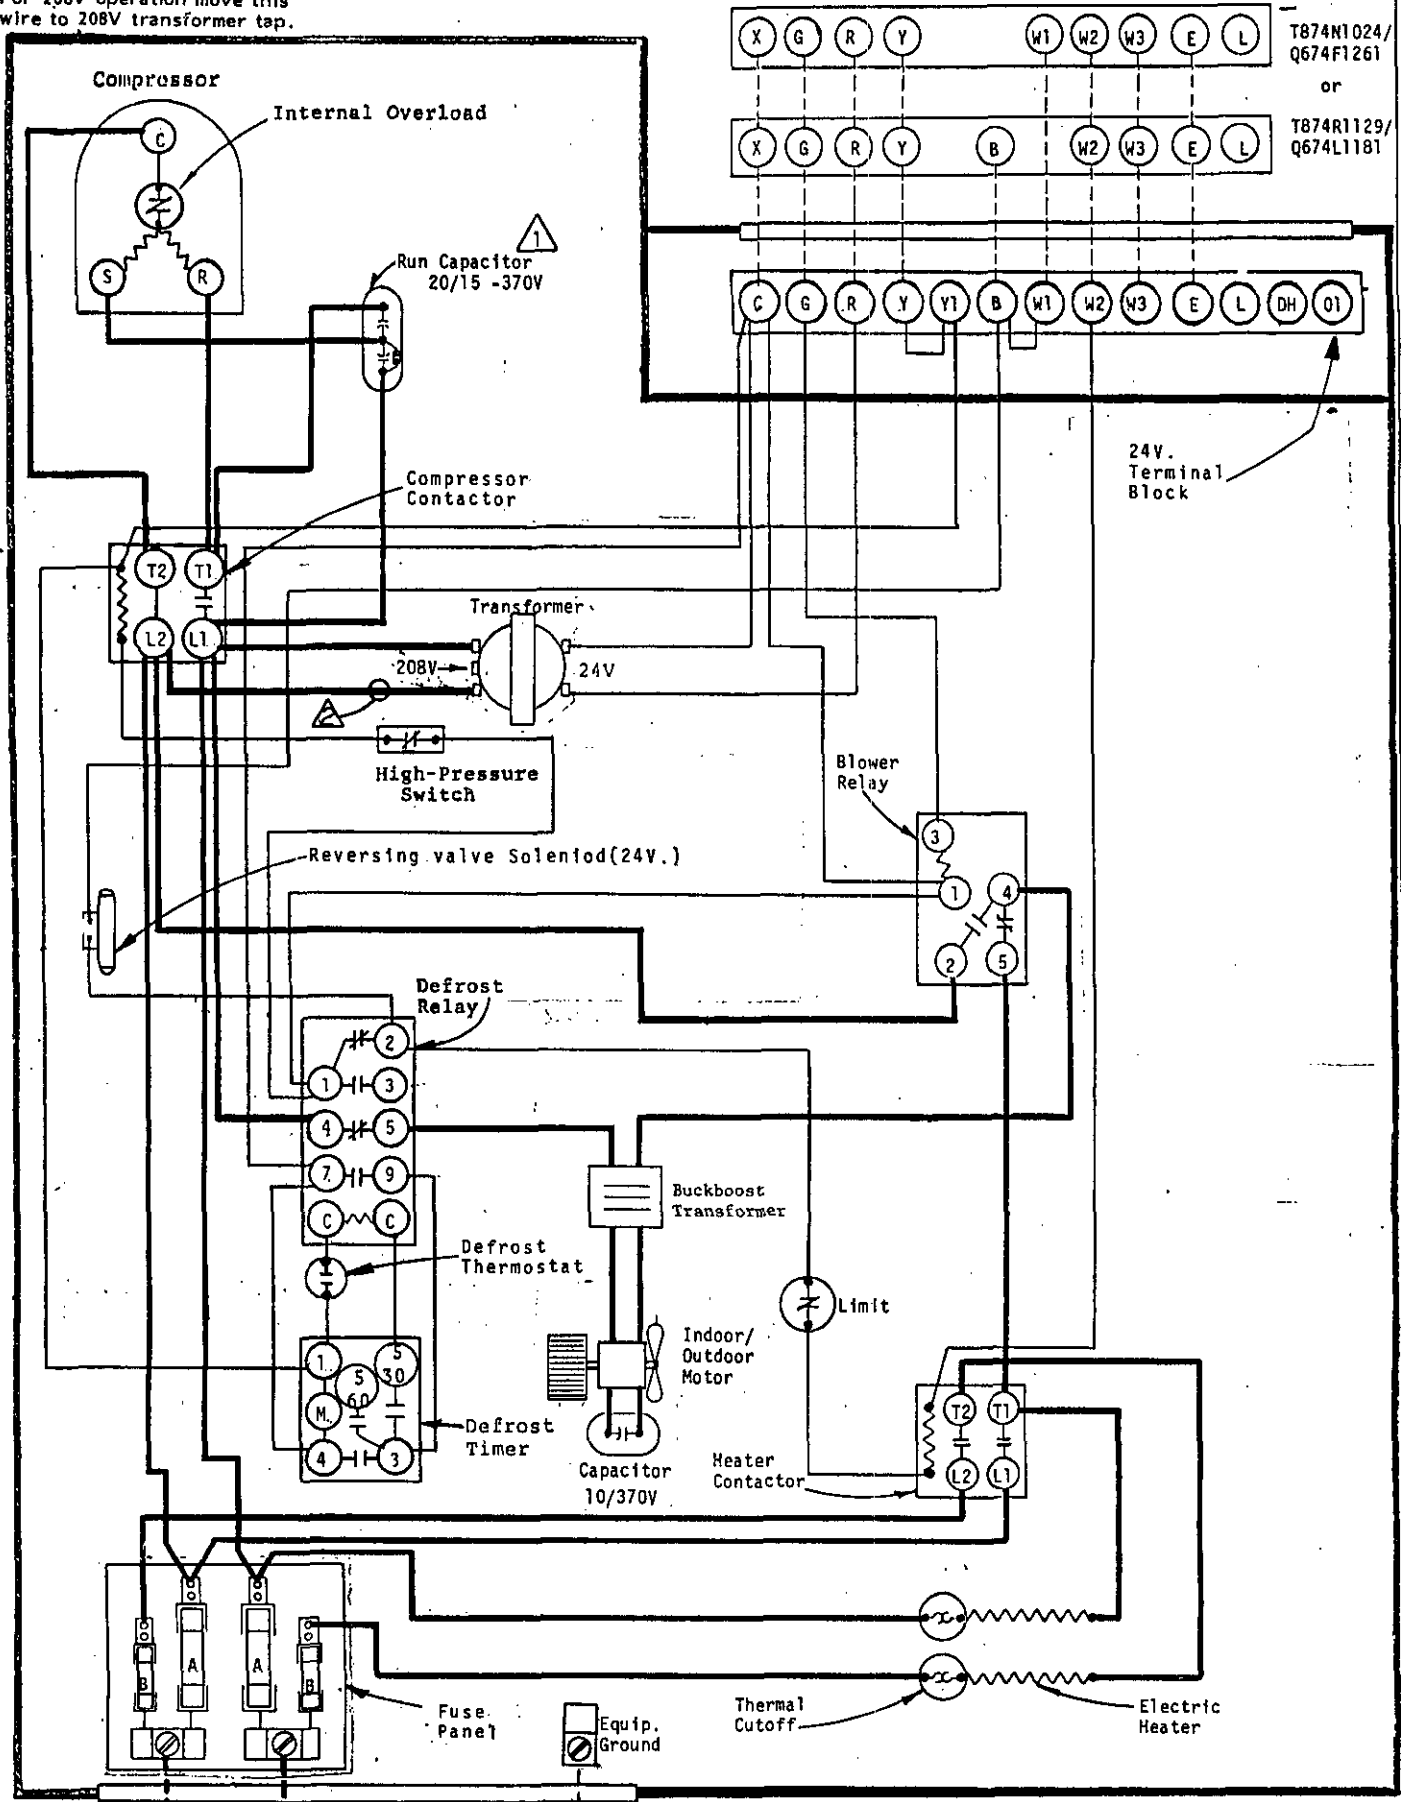

T874M1024/
Q674F1261

or

T874R1129/
Q674L1181

24V.
Terminal
Block

240/220-50-1
Fuse disconnect
switch

FUSE A-60A Time Delay
FUSE B-30A Standard

use copper or
aluminum wire

FACTORY WIRING	FIELD WIRING
Low Voltage ———	-----
High Voltage ———	-----

MODEL
2 TON
w/ 8 Kw

4003-431