


Immersion  
Crankcase  
Heater

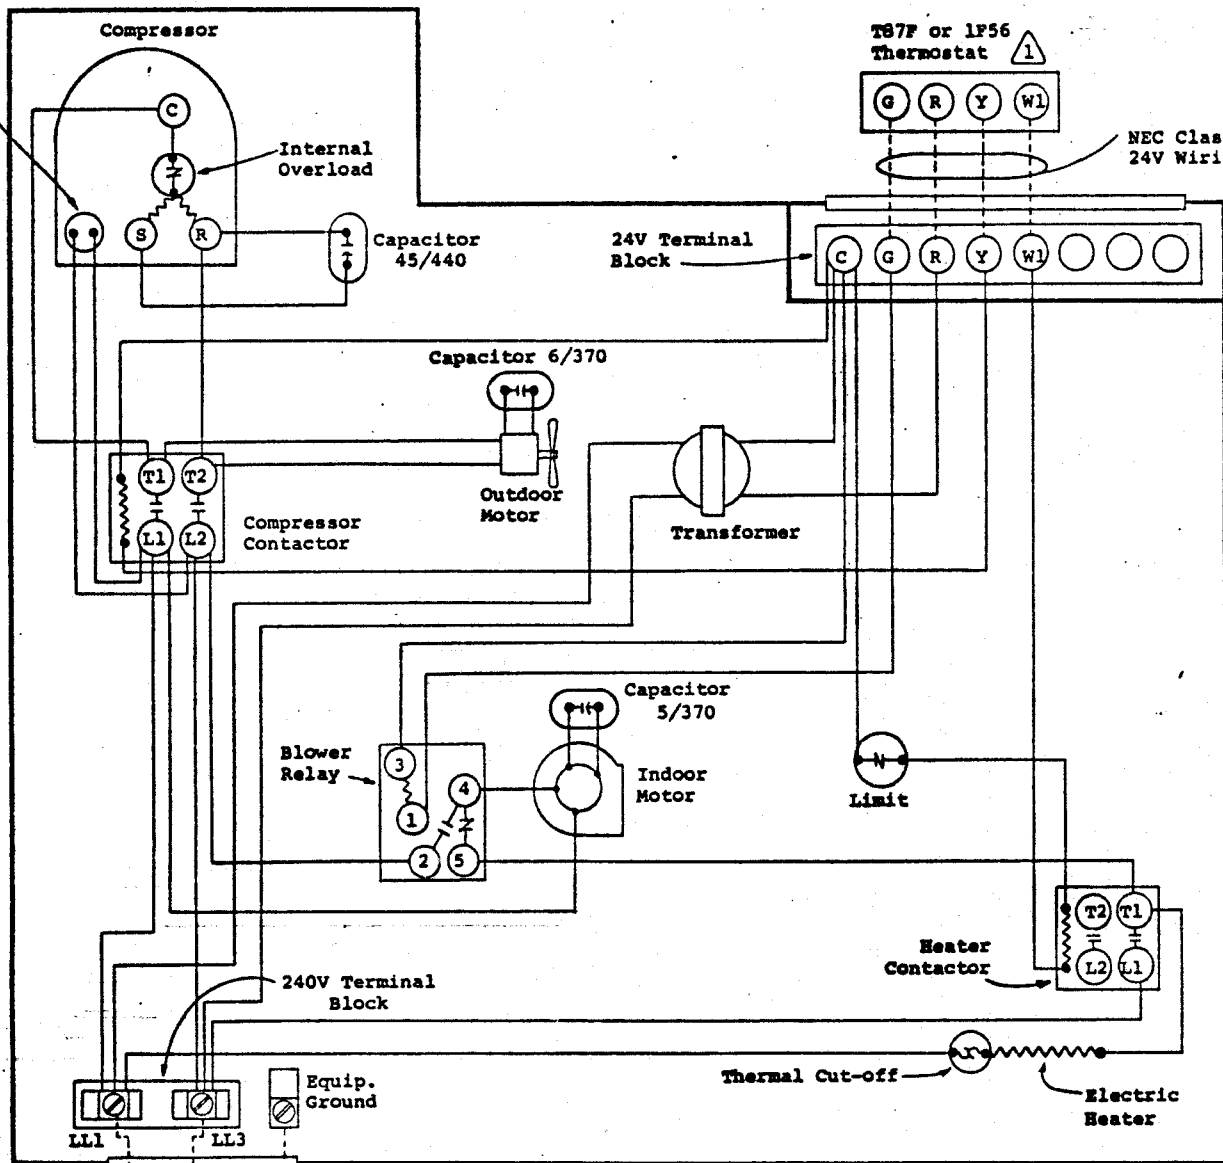

T87F or 1F56  
Thermostat

NEC Class 2  
24V Wiring

24V Terminal  
Block

Capacitor  
45/440

Capacitor 6/370

Capacitor  
5/370

Blower  
Relay

Indoor  
Motor

Limit

240V Terminal  
Block

Equip.  
Ground

Thermal Cut-off

Electric  
Heater

Fused  
Disconnect  
Switch

230/208-60-1

USE COPPER OR  
ALUMINUM WIRE

⚠ See alternate thermostat sheet.  
Set heat anticipator at .40A

MODEL  
48WA3  
w/5Kw

Factory Wiring \_\_\_\_\_  
Field Wiring - - - - -