

CONNECTION DIAGRAM DANGER: ELECTRICAL SHOCK HAZARD
DISCONNECT POWER BEFORE SERVICING.

CHART A (FACTORY SETTINGS)



MODEL	INPUT RATE GPH	HEATING BLOWER SPEED (COLOR)	COOLING BLOWER SPEED (COLOR)	TEMP. RISE RANGE
FC085036D	.65	LOW (RED)	HIGH (BLACK)	50° - 80°
	.75	MED (BLUE)	HIGH (BLACK)	60° - 90°

CHART B (COOLING BLOWER SPEEDS)

MODEL	NOMINAL AC (TONS)	SPEED (COLOR)	CFM @ .50" WC
FC085036D	2	LOW (RED)	775
	2.5	MED (BLUE)	1070
	3	HIGH (BLACK)	1230

MOTOR COLOR CODE	3 SPEED
WHITE	COMMON
BROWN	CAP
BLACK	HIGH
BLUE	MED
ORANGE	---
RED	LOW

SPEED TAPS AVAILABLE FOR HEATING AND COOLING INPUT RATINGS. SEE CHARTS A AND B.
NOTE: ONLY ONE HEATING AND ONE COOLING SPEED CAN BE CONNECTED. THE OTHER SPEED TAPS MUST BE TAPED OFF INDEPENDENTLY FROM ALL OTHER WIRES.

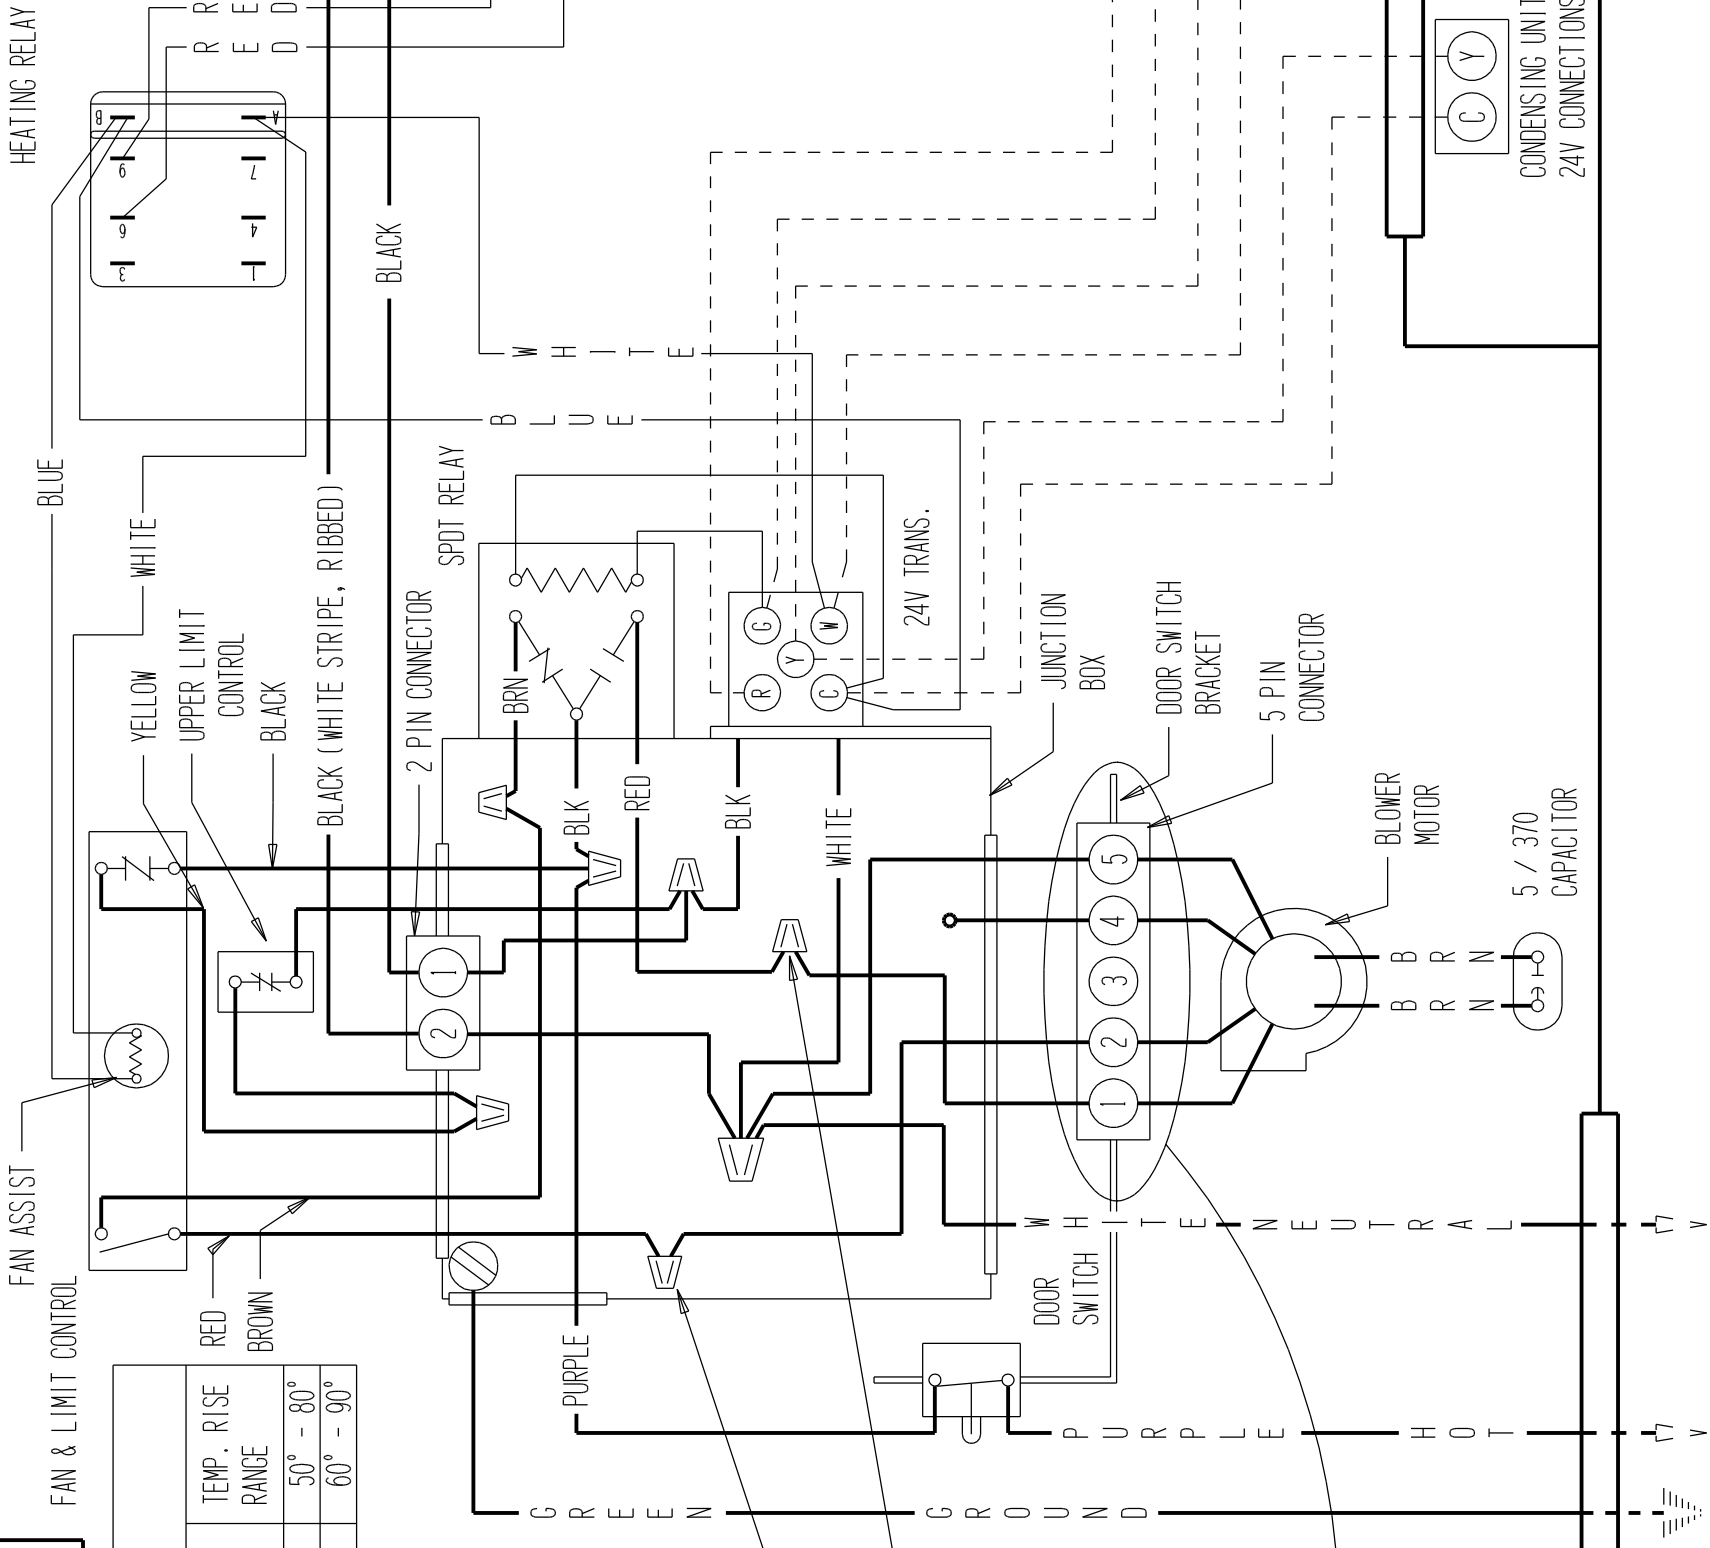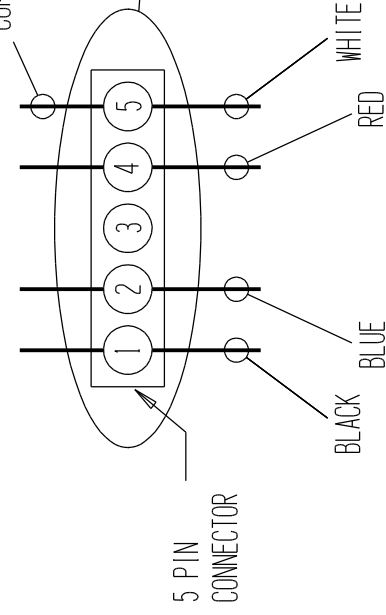

115-60-1

IF ANY OF THE ORIGINAL WIRE AS SUPPLIED WITH THE APPLANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST 105 DEG C.

