


| FACTORY SETTINGS | | | | |
|------------------|-----------|------------------------|------------|--------------------|
| UNIT | GPH INPUT | HTG. BLWR SPD. (COLOR) | TEMP. RISE | COLING BLWR. SPEED |
| FLF/R085D36E | 0.55 | LOW (RED) | 60°-90° | HIGH (BLACK) |
| | 0.65 | LOW (RED) | 60°-90° | HIGH (BLACK) |
| | 0.75 | MED (BLUE) | 60°-90° | HIGH (BLACK) |
| FLF/R110D48E | 0.85 | MED. HIGH (BLUE) | 60°-90° | HIGH (BLACK) |
| FLF/R110D60E | 1 | MED. HIGH (BLUE) | 60°-90° | HIGH (BLACK) |
| FLR140D60E | 1.1 | MED. HIGH (BLUE) | 60°-90° | HIGH (BLACK) |
| | 1.25 | MED. HIGH (BLUE) | 60°-90° | HIGH (BLACK) |

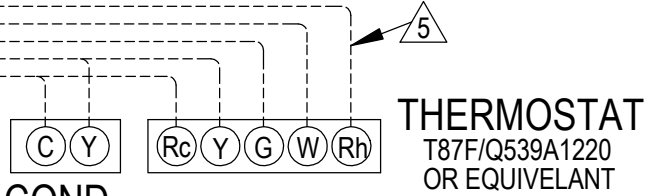

| COOLING BLOWER SPEEDS | | | |
|-----------------------|-----------------|------------------|--------------|
| UNIT | NOM. A/C (TONS) | SPEED (COLOR) | CFM@ .50" WC |
| FLF/R085D36E | 2 | LOW (RED) | 775 |
| | 2.5 | MED (BLUE) | 1070 |
| | 3 | HIGH (BLACK) | 1275 |
| FLF/R110D48E | 2.5 | LOW (RED) | 1065 |
| | 3 | MED LOW (ORANGE) | 1235 |
| | 3.5 | MED HIGH (BLUE) | 1415 |
| FLF/R110D60E | 4 | HIGH (BLACK) | 1525 |
| | 3 | LOW (RED) | 1190 |
| FLR140D60E | 3.5 | MED LOW (ORANGE) | 1400 |
| | 4 | MED HIGH (BLUE) | 1640 |
| | 5 | HIGH (BLACK) | 2250 |

| BLOWER CAPACITOR RATING | | |
|----------------------------|-------|-----------|
| UNIT | MOTOR | CAPACITOR |
| FLF/R085D36E | 1/3 | 5/370 |
| FLF/R110D48E | 1/2 | 7.5/370 |
| FLF/R110D60E FLR140D60E | 3/4 | 15/370 |

- NOTES**
- ⚠️ IF PRIMARY LIMIT WIRES ARE TO BE REPLACED, USE WIRE WITH INSUL. TEMP. RATING OF 200°C.
 - ⚡ HEATING SPEED CONNECTION POINT.
 - ⚡ COOLING SPEED CONNECTION POINT.
 - ⚡ ONLY ONE HEATING AND COOLING SPEED CAN BE CONNECTED. ALL OTHER TAPS CONNECT TO "SPARE" TERMINALS.
 - ⚡ DASHED LINES REPRESENT FIELD WIRING.

⚠️ DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE SERVICING.

4047-119 B
12-19-02