

NOTES

⚠️ IF PRIMARY LIMIT WIRES ARE TO BE REPLACED, USE WIRE WITH INSUL. TEMP. RATING OF 200°C.


⚠️ REMOVE PURPLE JUMPER WIRE FOR 2 STAGE AIR CONDITIONER OR HEAT PUMP.

WARNING

⚠️ IF ANY OF THE ORIGINAL WIRE AS SUPPLIED WITH THIS APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMP. RATING OF AT LEAST 105°C EXCEPT PRIMARY LIMIT WIRES. SEE NOTE "1".

ANGER

⚠️ *ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE SERVICING.

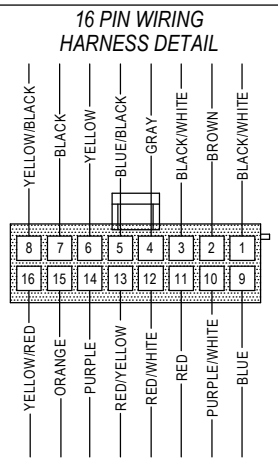

UNIT	NOM. A/C (TONS)	COOL SWITCH		CFM LOAD	
		DIP SW1	DIP SW2	FULL	PART
FH085V42A	3.5*	OFF*	OFF*	1400	1000
	3	ON	OFF	1200	850
	2.5	OFF	ON	1000	725
FH110V48A	2	ON	ON	800	575
	4*	OFF*	OFF*	1600	1150
	3.5	ON	OFF	1400	1000
FH110V60A	3	OFF	ON	1200	850
	2.5	ON	ON	1000	725
	5*	OFF*	OFF*	2000	1450
FH110V60A	4	ON	OFF	1600	1150
	3.5	OFF	ON	1400	1000
	3	ON	ON	1200	850

UNIT	GPH INPU	TEMP. RISE	HEAT SWITCH		HEATING CFM
			DIP SW1	DIP SW2	
FH085V42A	0.75	60°-90°	OFF*	OFF*	1075
	0.75	60°-90°	ON	OFF	1035
	0.65	60°-90°	OFF	ON	930
FH110V48A	0.55	60°-90°	ON	ON	790
	1	60°-90°	OFF*	OFF*	1280
	1	60°-90°	ON	OFF	1225
FH110V60A	0.85	60°-90°	OFF	ON	1060
	0.85	60°-90°	ON	ON	1060

MODEL	SWITCH #1	SWITCH #2	ON DELAY SECONDS	ON DELAY % CFM	PRE-RUN TIME SECONDS	PRE-RUN % CFM	OFF DELAY SECONDS	OFF DELAY % CFM
ALL	OFF	OFF	30	0	60	50	300	82
	ON	OFF	30	0	60	50	240	100
	OFF	ON	45	0	120	50	300	88
	ON	ON	60	0	0	100	180	100

4047-121 A