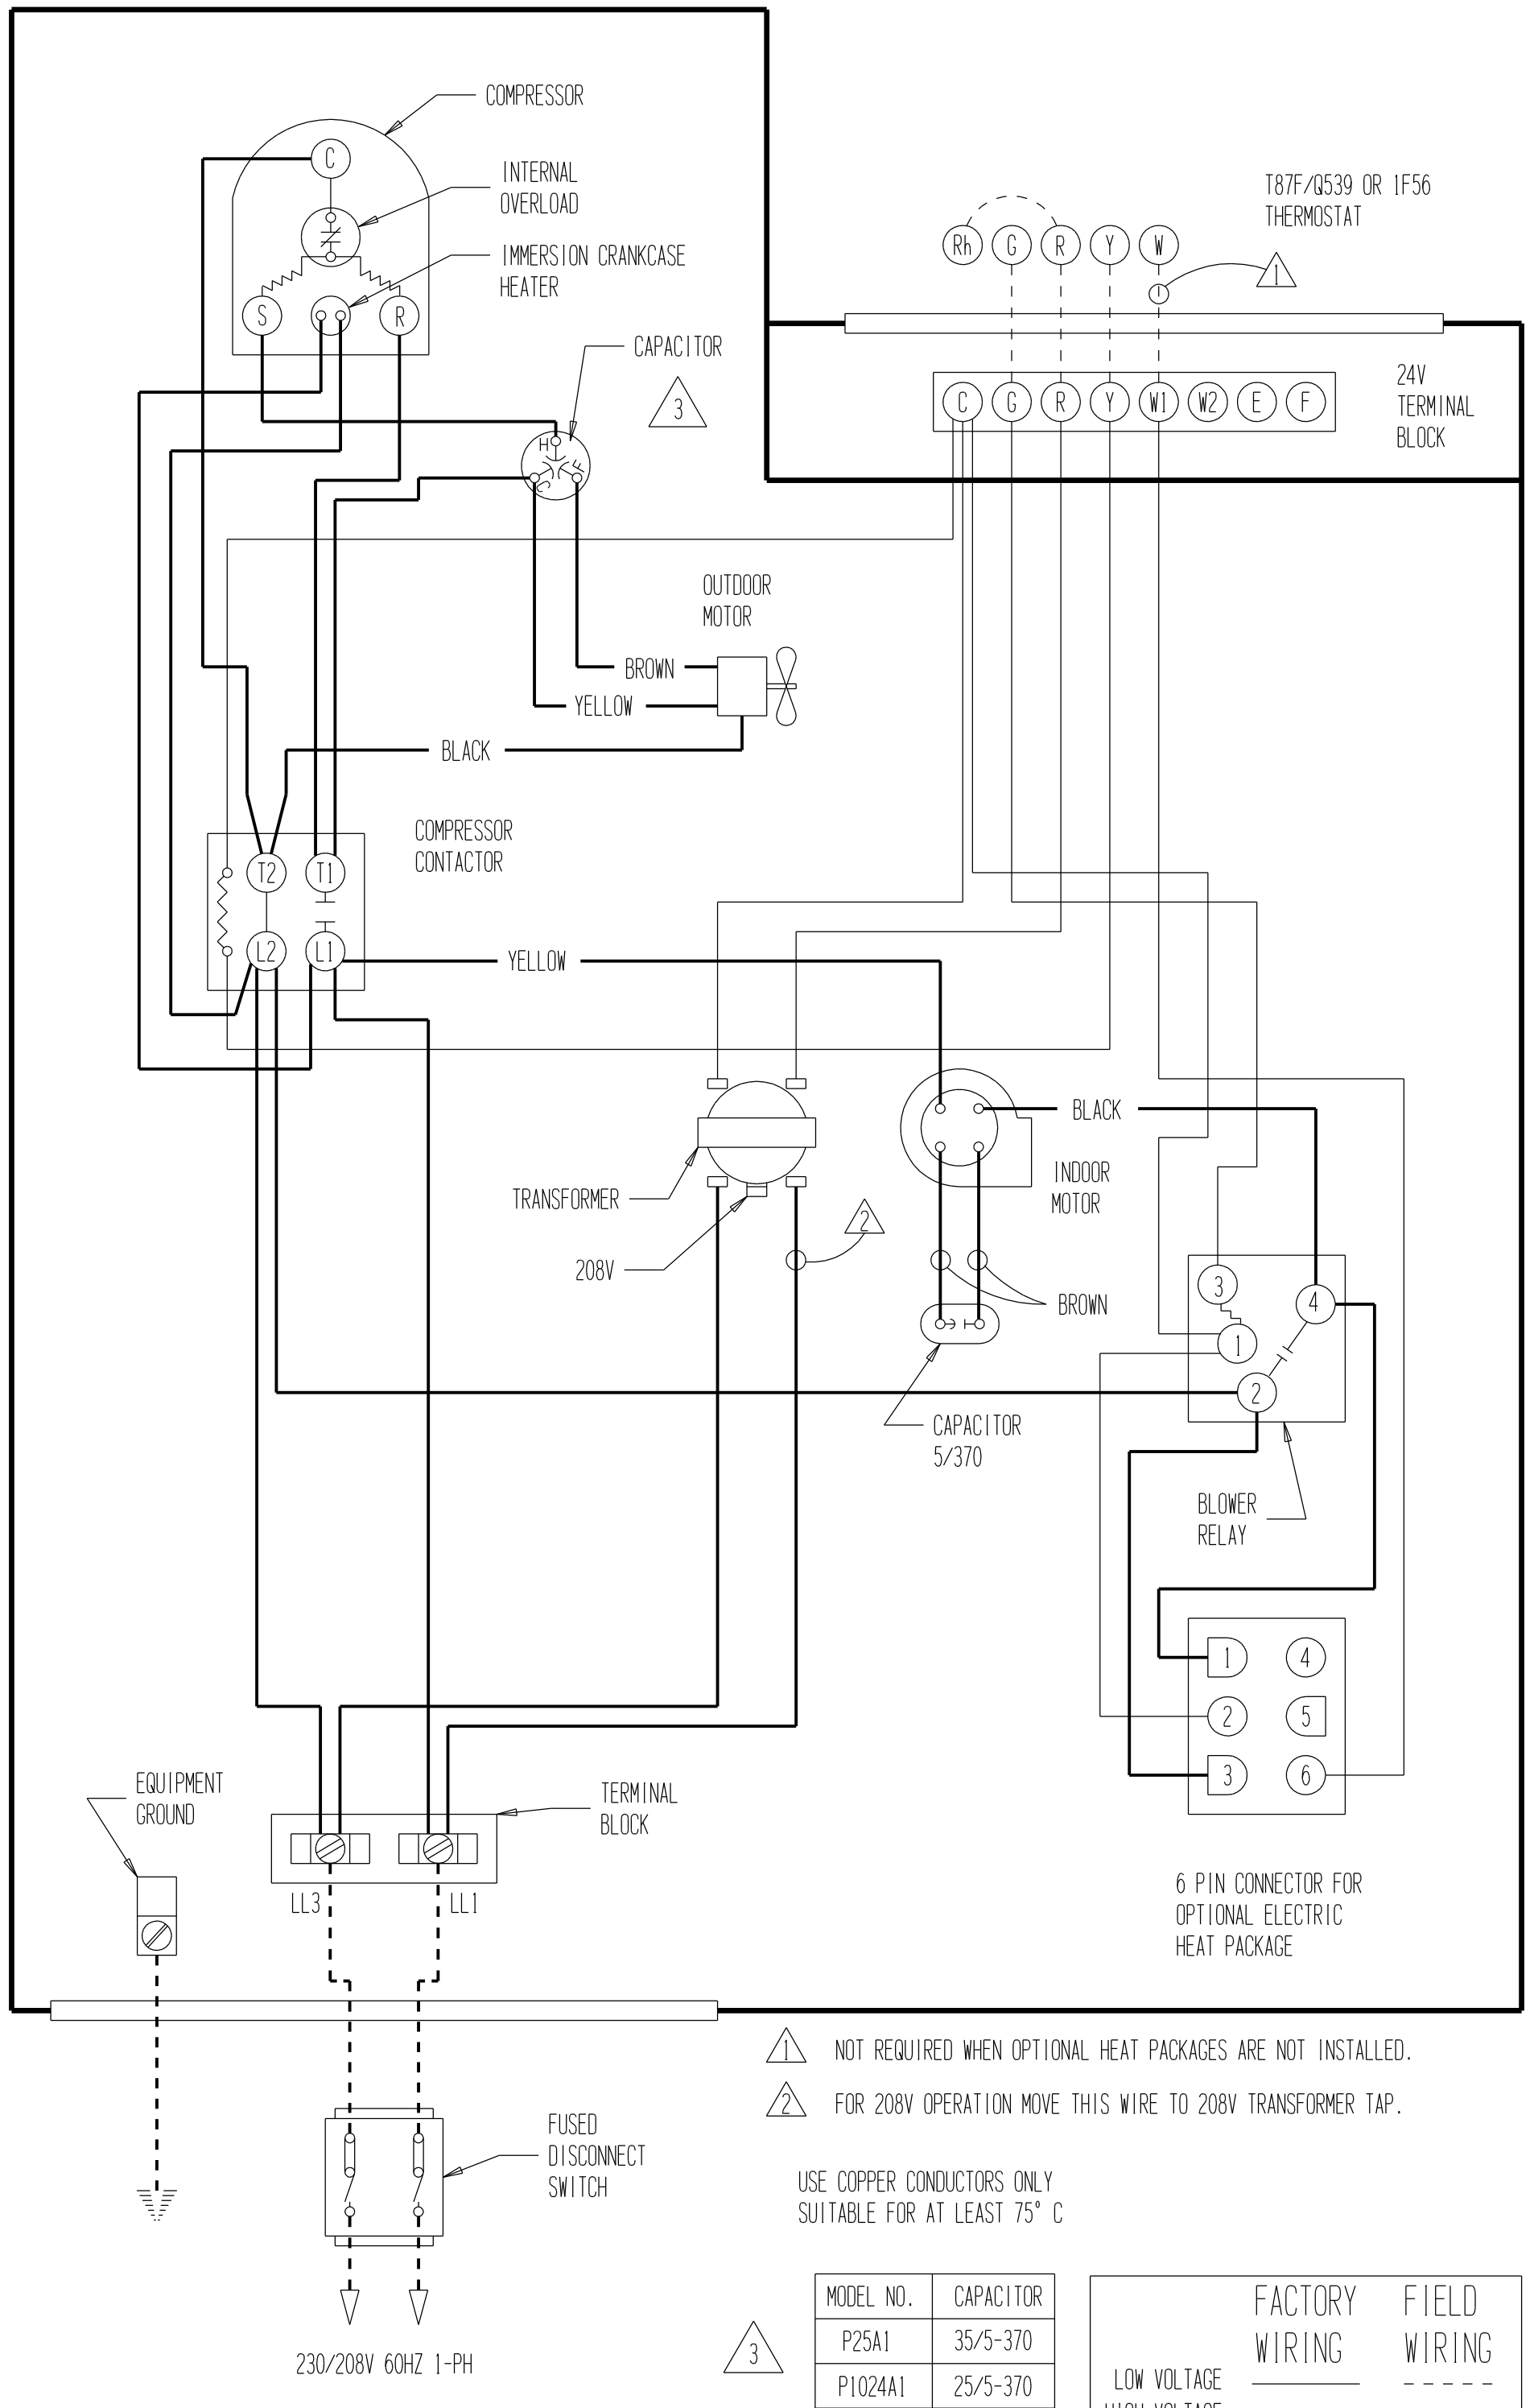

1. NOT REQUIRED WHEN OPTIONAL HEAT PACKAGES ARE NOT INSTALLED.
2. FOR 208V OPERATION MOVE THIS WIRE TO 208V TRANSFORMER TAP.

USE COPPER CONDUCTORS ONLY
SUITABLE FOR AT LEAST 75° C

3

MODEL NO.	CAPACITOR
P25A1	35/5-370
P1024A1	25/5-370

	FACTORY WIRING	FIELD WIRING
LOW VOLTAGE	———	- - - - -
HIGH VOLTAGE	———	- - - - -

4063-118 B