

### COMPONENT CODE


|      |                         |
|------|-------------------------|
| CB   | CIRCUIT BREAKER         |
| COMP | COMPRESSOR              |
| CC   | COMPRESSOR CONTACTOR    |
| CCM  | COMP. CONTROL MODULE    |
| FCB  | FURNACE CONTROL BOARD   |
| FR   | FLAME ROLLOUT           |
| FS   | FLAME SENSOR            |
| GND  | GROUND                  |
| GV   | GAS VALVE               |
| HPC  | HIGH PRESSURE CONTROL   |
| IBC  | INDOOR BLOWER CAPACITOR |
| IBM  | INDOOR BLOWER MOTOR     |
| IDB  | INDUCED DRAFT BLOWER    |
| LAC  | LOW AMBIENT CONTROL     |
| LPC  | LOW PRESSURE CONTROL    |
| DFC  | OUTDOOR FAN CAPACITOR   |
| DFM  | OUTDOOR FAN MOTOR       |
| PL1  | 2 PIN PLUG              |
| PM   | PHASE MONITOR           |
| PRL  | PRIMARY LIMIT           |
| PS   | PRESSURE SWITCH         |
| SI   | SPARK IGNITER           |
| SL   | SECONDARY LIMIT         |
| T    | TRANSFORMER             |
| TB   | TERMINAL BLOCK          |
| TS   | TERMINAL STRIP          |

USE COPPER OR ALUMINUM WIRE

### ⚠ DANGER

\* ELECTRIC SHOCK HAZARD  
\* DISCONNECT POWER BEFORE SERVICING

| BLOWER SPEED COLOR CODE |        |
|-------------------------|--------|
| HIGH                    | BLACK  |
| MEDIUM HIGH             | BLUE   |
| MEDIUM LOW              | PURPLE |
| LOW                     | RED    |
| AUX.                    | ORANGE |

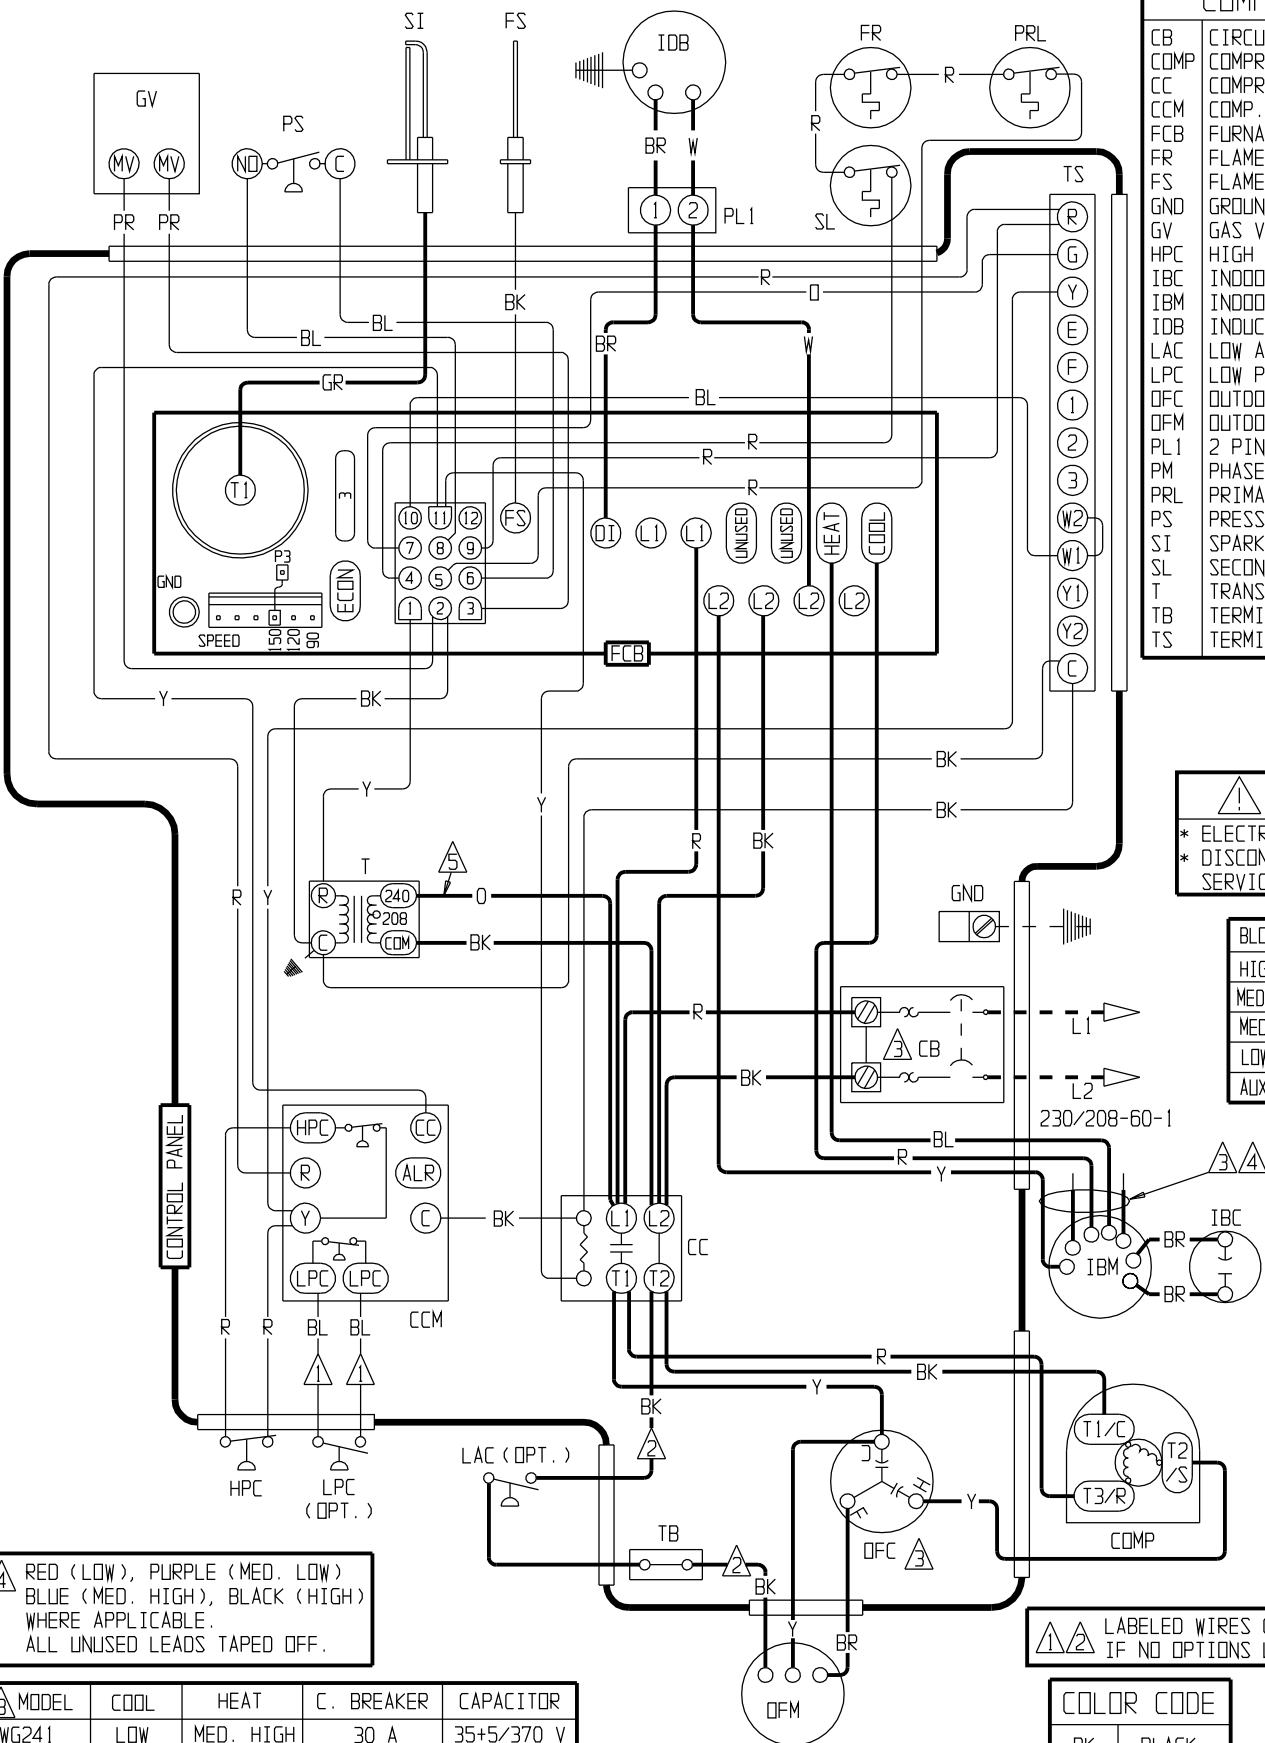

⚠ RED (LOW), PURPLE (MED. LOW)  
BLUE (MED. HIGH), BLACK (HIGH)  
WHERE APPLICABLE.  
ALL UNUSED LEADS TAPED OFF.

| MODEL | COOL | HEAT      | C. BREAKER | CAPACITOR  |
|-------|------|-----------|------------|------------|
| WG241 | LOW  | MED. HIGH | 30 A       | 35+5/370 V |

⚠ FOR 208V OPER. USE 208V TAP

IF ANY OF THE ORIGINAL WIRE AS SUPPLIED WITH THE APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST 105°C EXCEPT THE IGNITION CABLE WHICH IS 250° HIGH VOLTAGE CABLE.

| WIRING CODE |                 |
|-------------|-----------------|
| 230/208 VAC | FACTORY ———     |
| 230/208 VAC | FIELD - - - - - |
| 24 VAC      | FACTORY ———     |
| 24 VAC      | FIELD - - - - - |

⚠ Labeled wires connect if no options used

| COLOR CODE |        |
|------------|--------|
| BK         | BLACK  |
| BL         | BLUE   |
| BR         | BROWN  |
| GR         | GRAY   |
| O          | ORANGE |
| PR         | PURPLE |
| R          | RED    |
| W          | WHITE  |
| Y          | YELLOW |