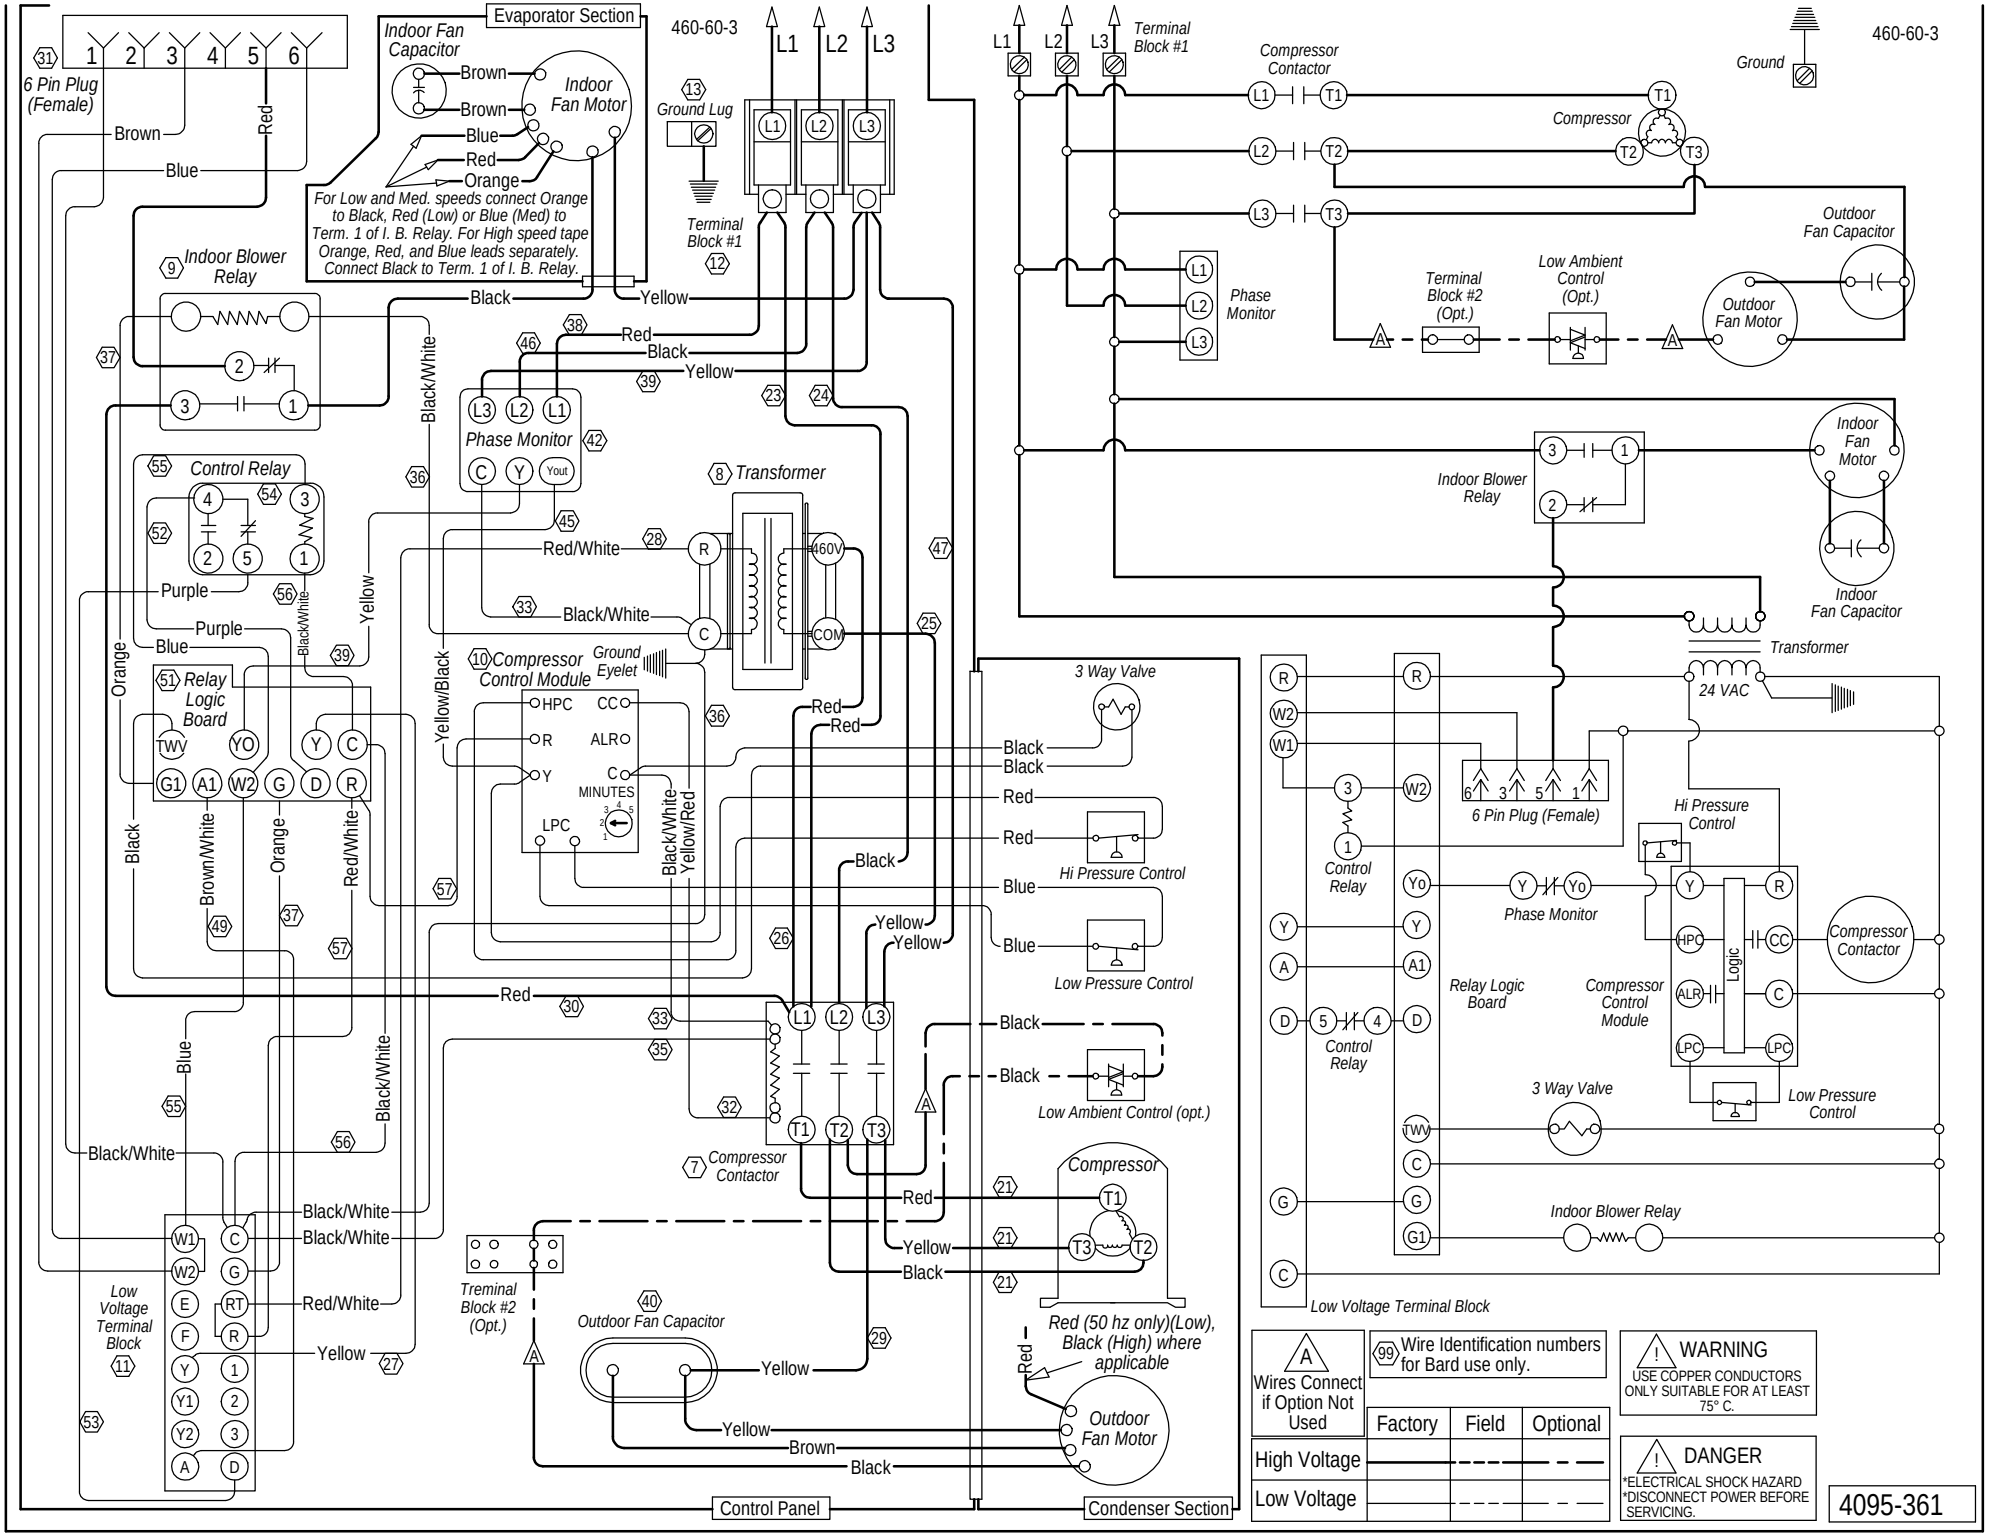
Evaporator Section
460-60-3
6 Pin Plug (Female)
Indoor Fan Capacitor
Indoor Fan Motor
Brown
Blue
Red
Orange
For Low and Med. speeds connect Orange to Black, Red (Low) or Blue (Med) to Term. 1 of I. B. Relay. For High speed tape Orange, Red, and Blue leads separately. Connect Black to Term. 1 of I. B. Relay.
Ground Lug
Terminal Block #1
Indoor Blower Relay
Black
Yellow
Phase Monitor
Control Relay
Transformer
Red/White
Black/White
Purple
Relay Logic Board
Compressor Control Module
Ground Eyelet
HPC
CC
ALR
LPC
MINUTES
Yellow/Black
Yellow/Red
Brown/White
Red/White
3 Way Valve
Hi Pressure Control
Low Pressure Control
Low Ambient Control (opt.)
Compressor Contactor
Compressor
Low Voltage Terminal Block
Treminal Block #2 (Opt.)
Outdoor Fan Capacitor
Outdoor Fan Motor
Red (50 hz only)(Low), Black (High) where applicable
Control Panel
Condenser Section
Terminal Block #1
Compressor Contactor
Compressor
Ground
460-60-3
Phase Monitor
Terminal Block #2 (Opt.)
Low Ambient Control (opt.)
Outdoor Fan Capacitor
Outdoor Fan Motor
Indoor Blower Relay
Indoor Fan Motor
Indoor Fan Capacitor
Transformer
24 VAC
6 Pin Plug (Female)
Hi Pressure Control
Control Relay
Phase Monitor
Relay Logic Board
Compressor Control Module
Compressor Contactor
3 Way Valve
Low Pressure Control
Indoor Blower Relay
Low Voltage Terminal Block
A Wires Connect if Option Not Used
99 Wire Identification numbers for Bard use only.
Factory
Field
Optional
High Voltage
Low Voltage
WARNING
USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C.
DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE SERVICING.
4095-361