


USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT
LEAST 75° C

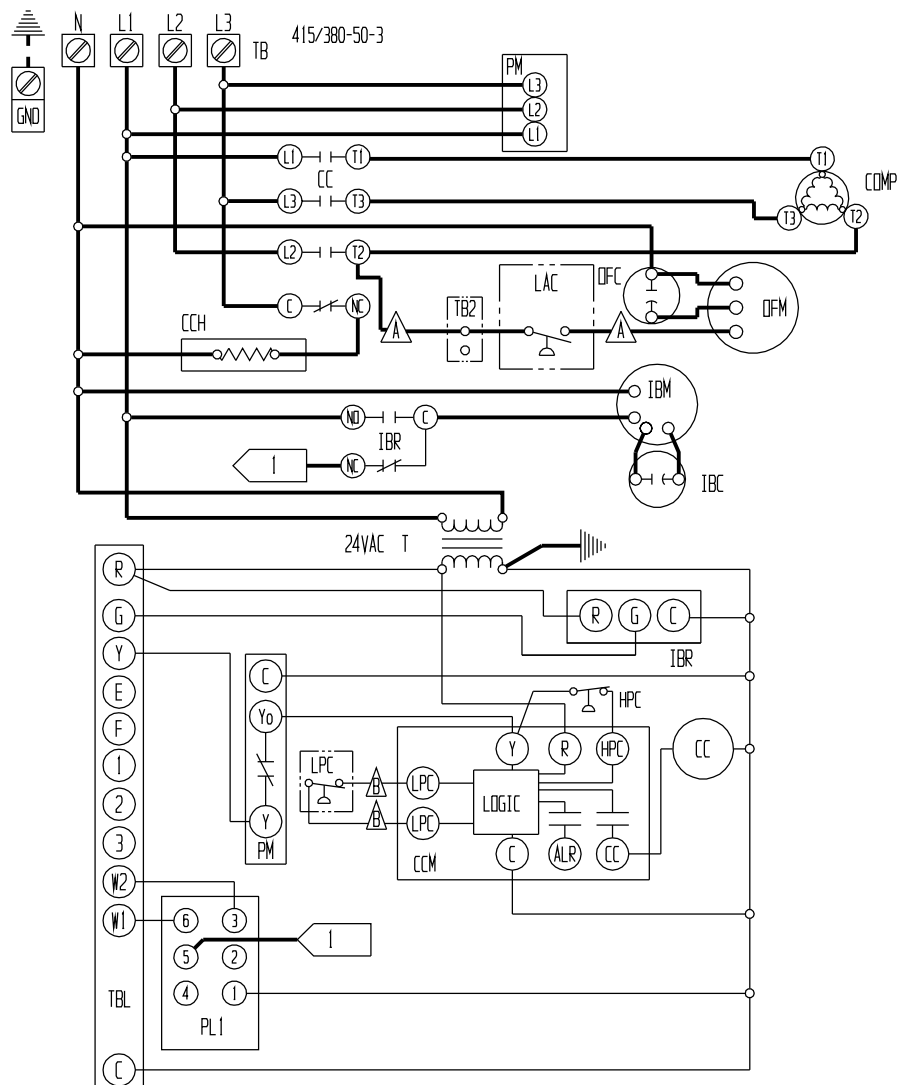

COMPONENT CODE			
CB1	CIRCUIT BREAKER #1	TBM	INDOOR BLOWER MOTOR
CB2	CIRCUIT BREAKER #2	IBR	INDOOR BLOWER RELAY
CC	COMPRESSOR CONTACTOR	LPC	LOW PRESSURE CONTROL
CCH	CRANKCASE HEATER	LS	LIMIT SWITCH
CCM	COMPRESSOR CONTROL MODULE	OFM	OUTDOOR FAN CAPACITOR
COMP	COMPRESSOR	OFM	OUTDOOR FAN MOTOR
GND	EQUIPMENT GROUND	PL1	PLUG #1
H1	HEAT STRIP #1	PM	PHASE MONITOR
H2	HEAT STRIP #2	T	TRANSFORMER
HC1	HEATER CONTACTOR #1	TB	TERMINAL BLOCK
HC2	HEATER CONTACTOR #2	TBL	LOW VOLTAGE TERMINAL BLOCK
HPC	HIGH PRESSURE CONTROL	TCO	THERMAL CUTOFF
IBC	INDOOR BLOWER CAPACITOR		

△	△	Labeled wires connect if no options used	△	Move red wire to 208V tap for 380V operation	△	RED (LOW) BLACK (HIGH) WIRE APPLICABLE	△	HIGH (BLACK) SPEED TAP NOT TO BE USED ON 50 HZ MODELS			
HIGH VOLTAGE				LOW VOLTAGE				ACCESSORY			
FACTORY STD.			FIELD			OPTIONAL			COLOR CODE		
BK	BLACK	Y	YELLOW	V	VIOLET	T	TAN	BARD MFG. CO.			
BR	BROWN	G	GREEN	(PR)	PURPLE	PK	PINK	4095-627 C			
R	RED	BL	BLUE	GY	GRAY	L	LAVENDER				
O	ORANGE	W	WHITE	(S)	SLATE						