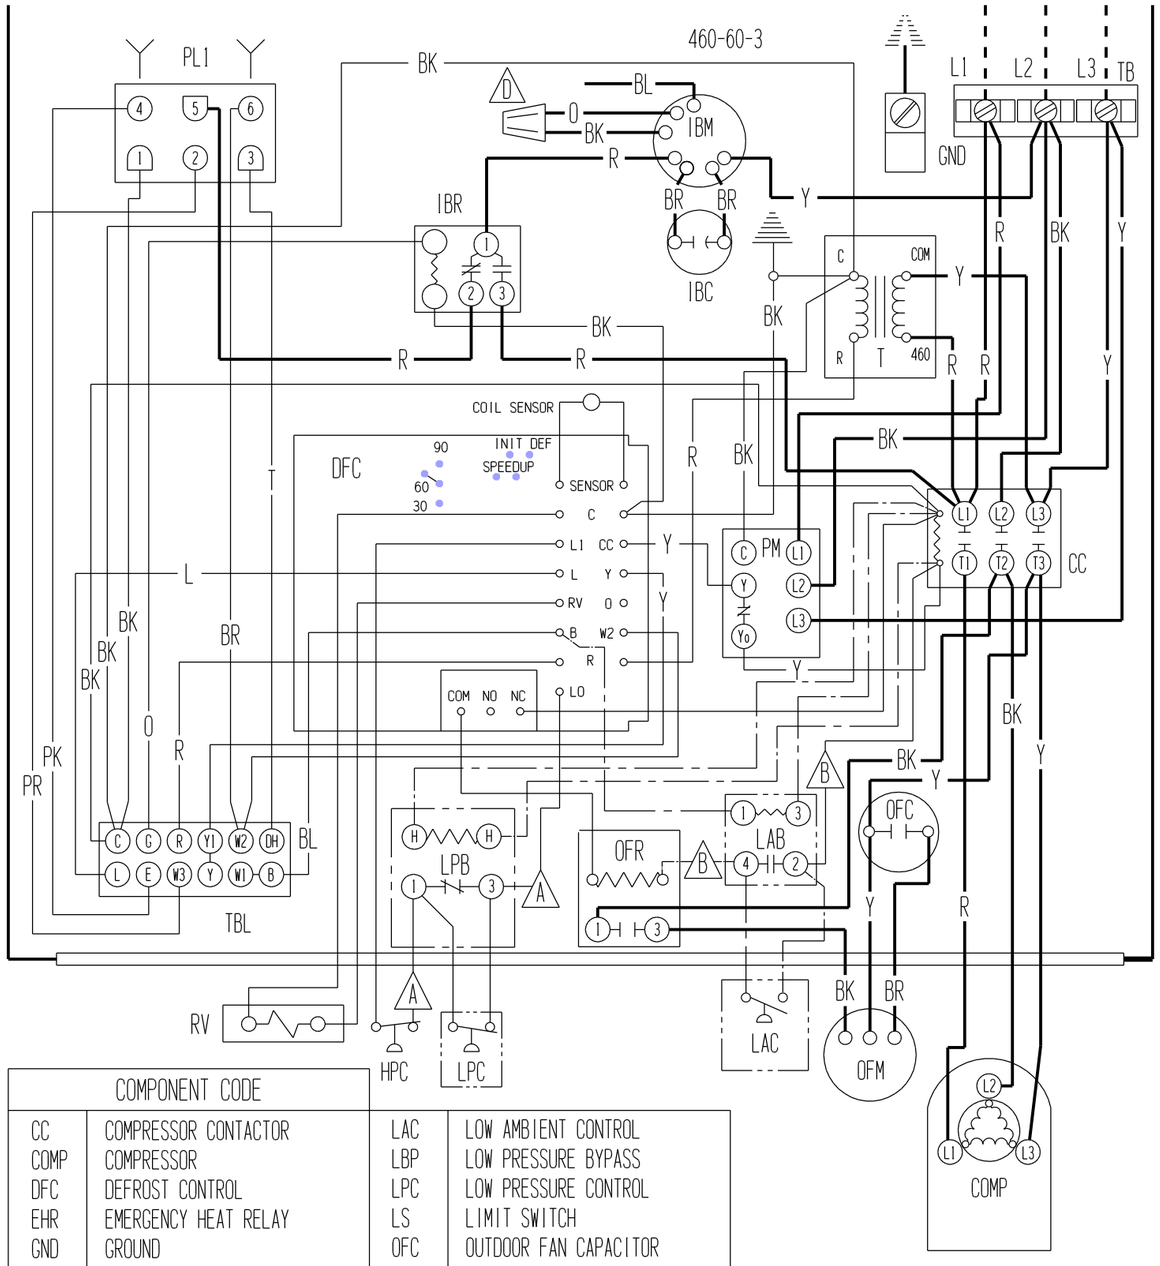

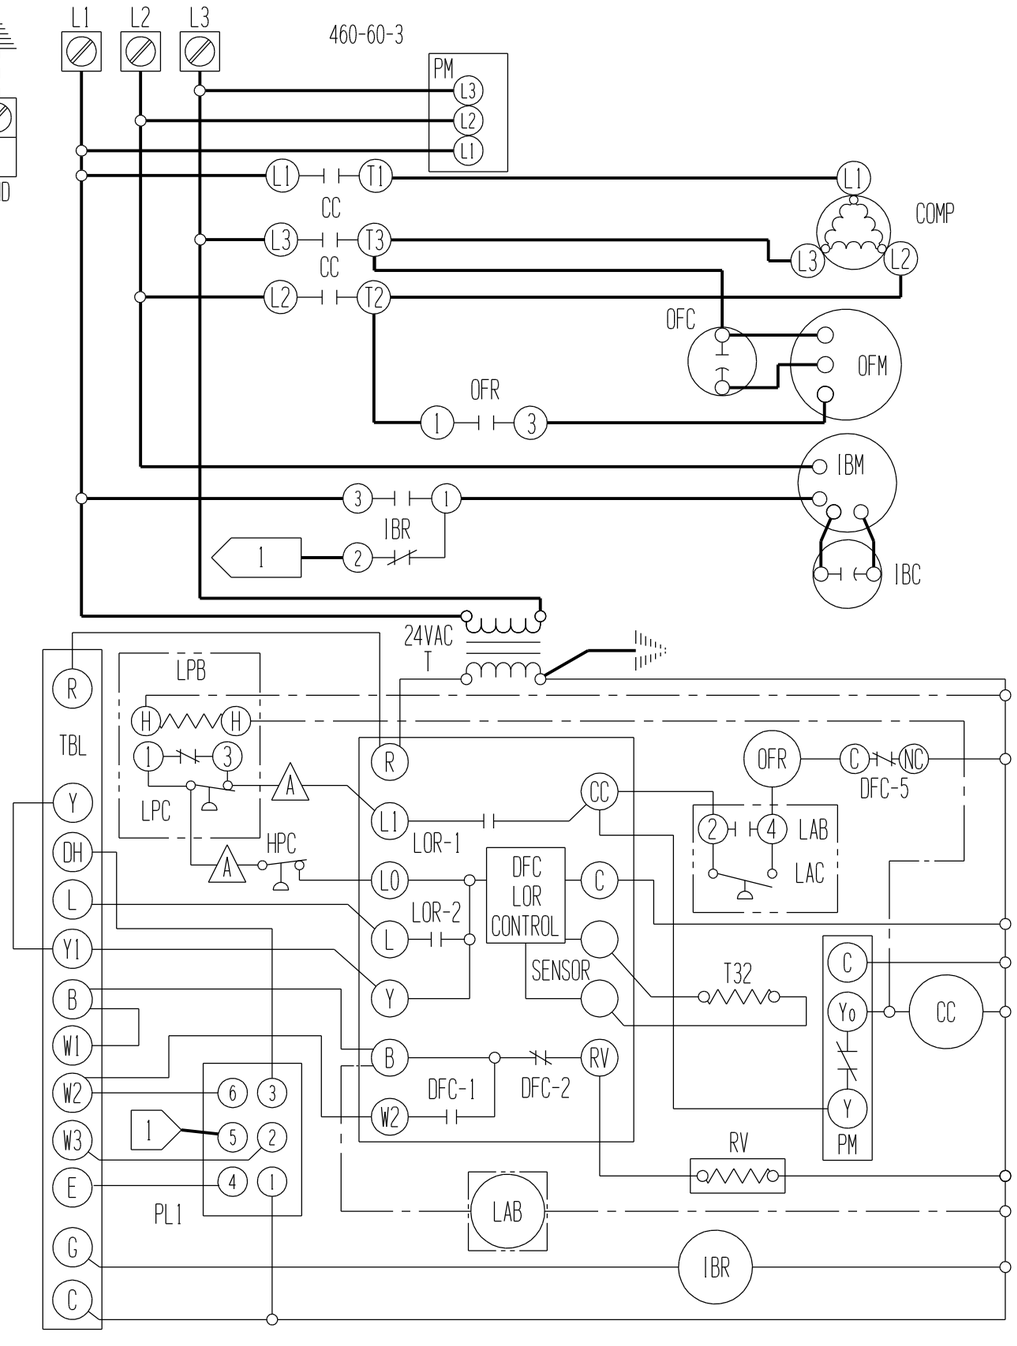

COMPONENT CODE			
CC	COMPRESSOR CONTACTOR	LAC	LOW AMBIENT CONTROL
COMP	COMPRESSOR	LBP	LOW PRESSURE BYPASS
DFC	DEFROST CONTROL	LPC	LOW PRESSURE CONTROL
EHR	EMERGENCY HEAT RELAY	LS	LIMIT SWITCH
GND	GROUND	OFC	OUTDOOR FAN CAPACITOR
H1	HEAT STRIP #1	OFM	OUTDOOR FAN MOTOR
H2	HEAT STRIP #2	OFR	OUTDOOR FAN RELAY
HC1	HEATER CONTACTOR #1	PL1	PLUG #1
HC2	HEATER CONTACTOR #2	PD	PULL DISCONNECT
HPC	HIGH PRESSURE CONTROL	PM	PHASE MONITOR
IBC	INDOOR BLOWER CAPACITOR	RV	REV. VALVE SOLINOID
IBM	INDOOR BLOWER MOTOR	SK	START KIT
IBR	INDOOR BLOWER RELAY	T	TRANSFORMER
LAB	LOW AMBIENT BYPASS	TB	TERMINAL BLOCK
		TBL	LOW VOLTAGE TERMINAL BLOCK
		TCO	THERMAL CUTOFF

USE COPPER CONDUCTORS ONLY
SUITABLE FOR AT LEAST 75° C

A , B LABELED WIRES CONNECT IF NO OPTIONS USED.

D FOR LOW & MEDIUM SPEEDS CONNECT ORANGE TO BLACK. RED (LOW) OR BLUE (MEDIUM) TO T1 OF IBR. FOR HIGH SPEED TAPE ORANGE, RED, BLUE LEADS SEPARATELY. CONNECT BLACK TO T1 OF IBR.

	FACTORY STD.	FIELD	OPTIONAL
HIGH VOLTAGE	———	- - - - -	—·—·—
LOW VOLTAGE	———	- - - - -	—·—·—
ACCESSORY			—·—·—

COLOR CODE							
BK	BLACK	Y	YELLOW	V	VIOLET	T	TAN
BR	BROWN	G	GREEN	(PR)	PURPLE	PK	PINK
R	RED	BL	BLUE	GY	GRAY	L	LAVENDER
O	ORANGE	W	WHITE	(S)	SLATE		

BARD MFG. CO.

4096-325