


**WARNING**  
 USE COPPER CONDUCTORS  
 ONLY SUITABLE FOR AT LEAST  
 75° C.

**DANGER**  
 ELECTRICAL SHOCK HAZARD  
 \*DISCONNECT POWER BEFORE  
 SERVICING.

Standard Diagram

Ladder Diagram

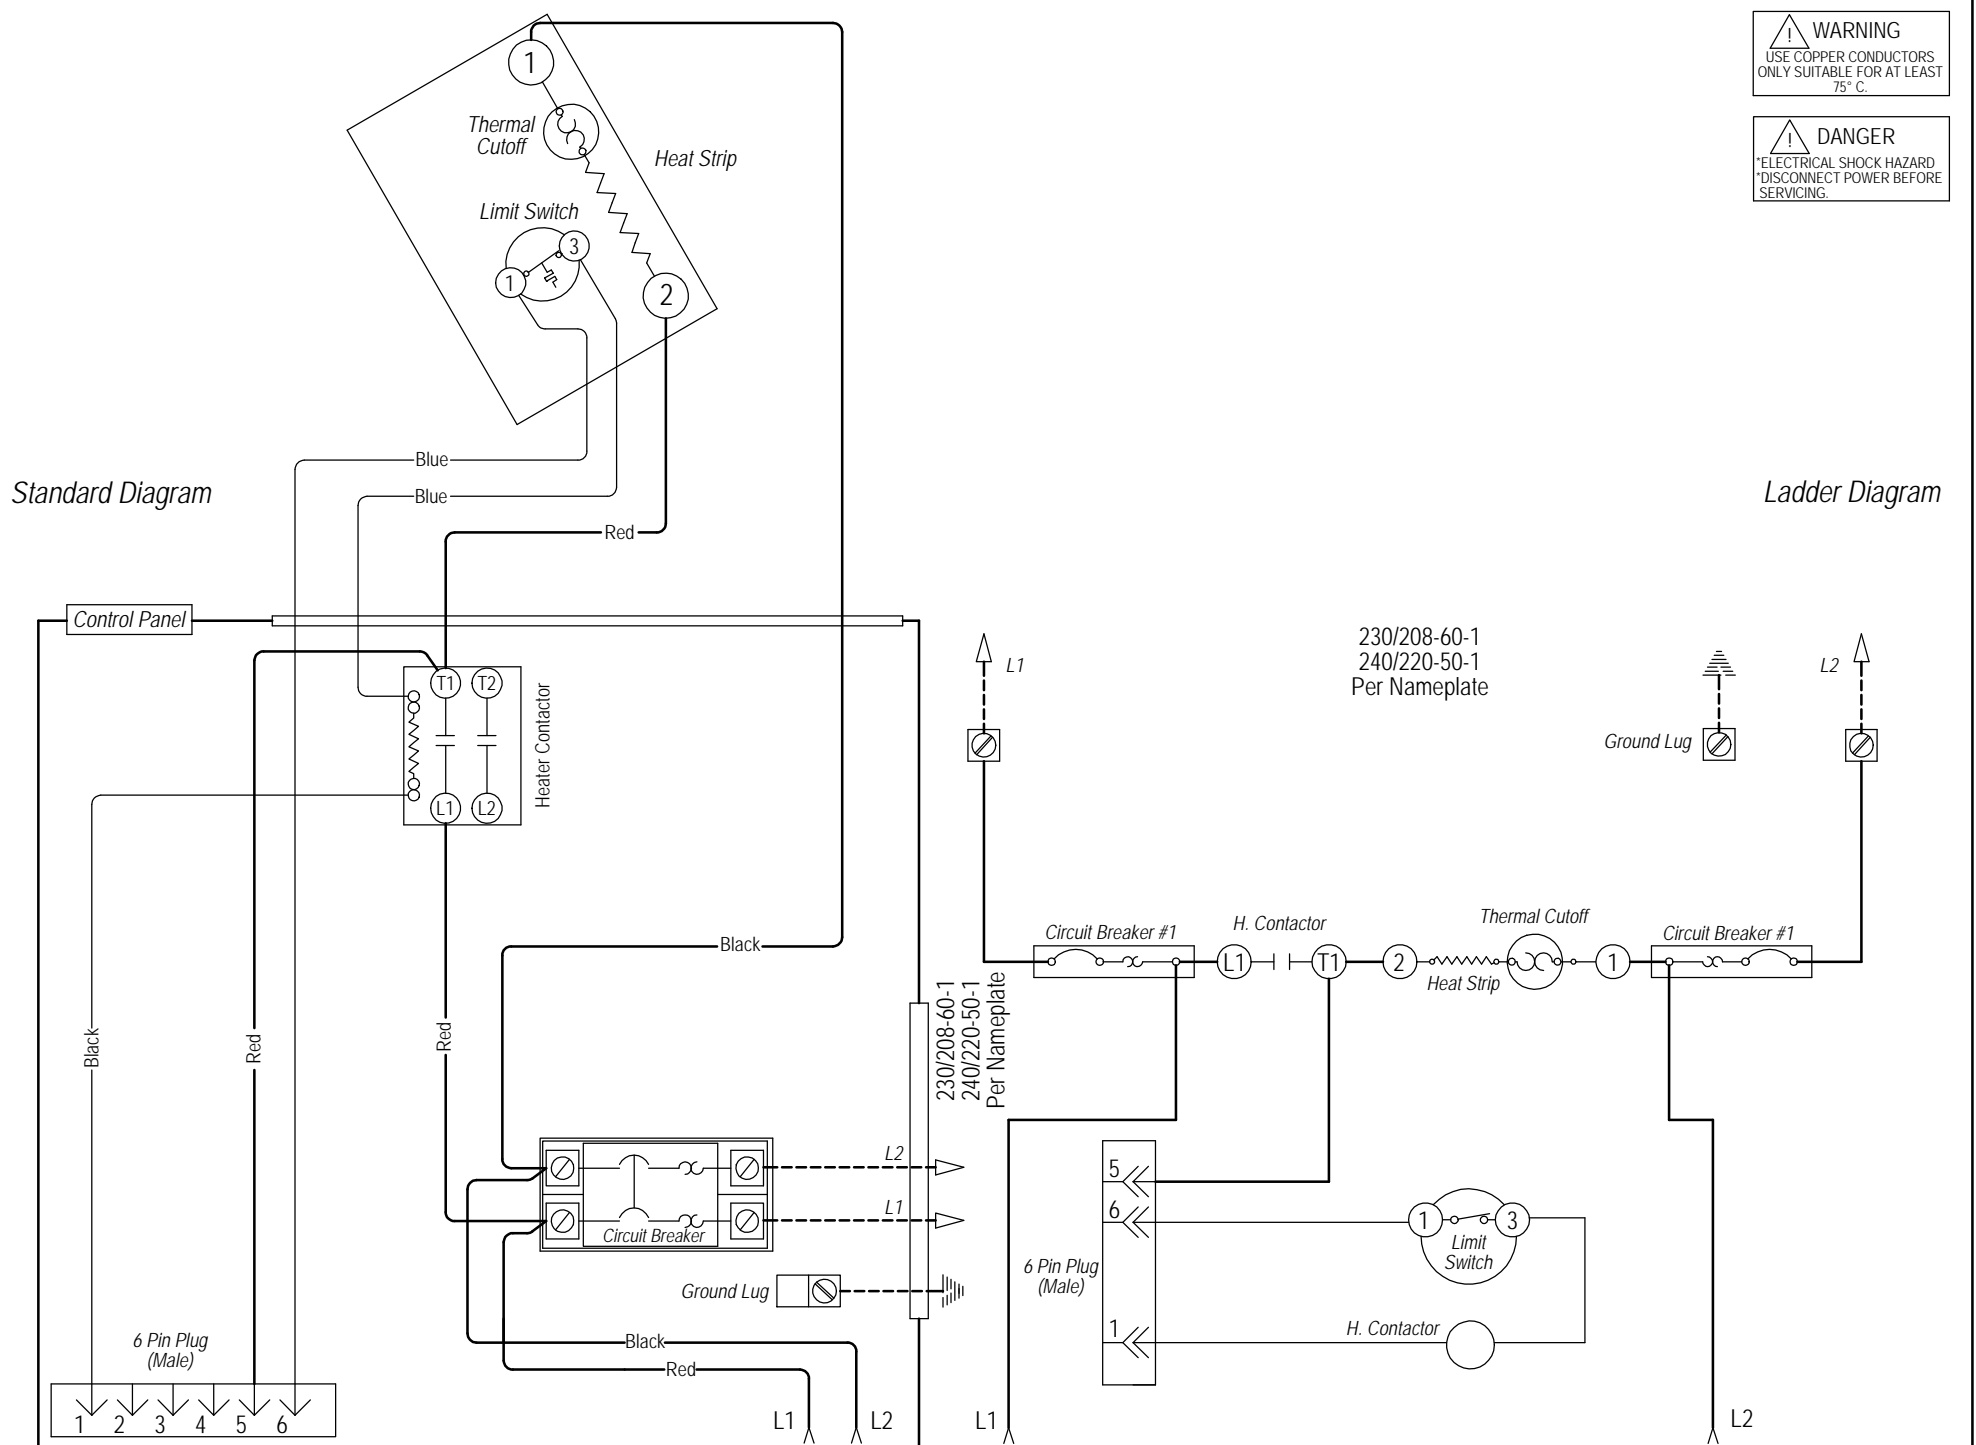

230/208-60-1  
 240/220-50-1  
 Per Nameplate

230/208-60-1  
 240/220-50-1  
 Per Nameplate

6 Pin Plug  
 (Male)