


WARNING
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.

DANGER
ELECTRICAL SHOCK HAZARD
DISCONNECT POWER BEFORE
SERVICING.

Standard Diagram

Ladder Diagram

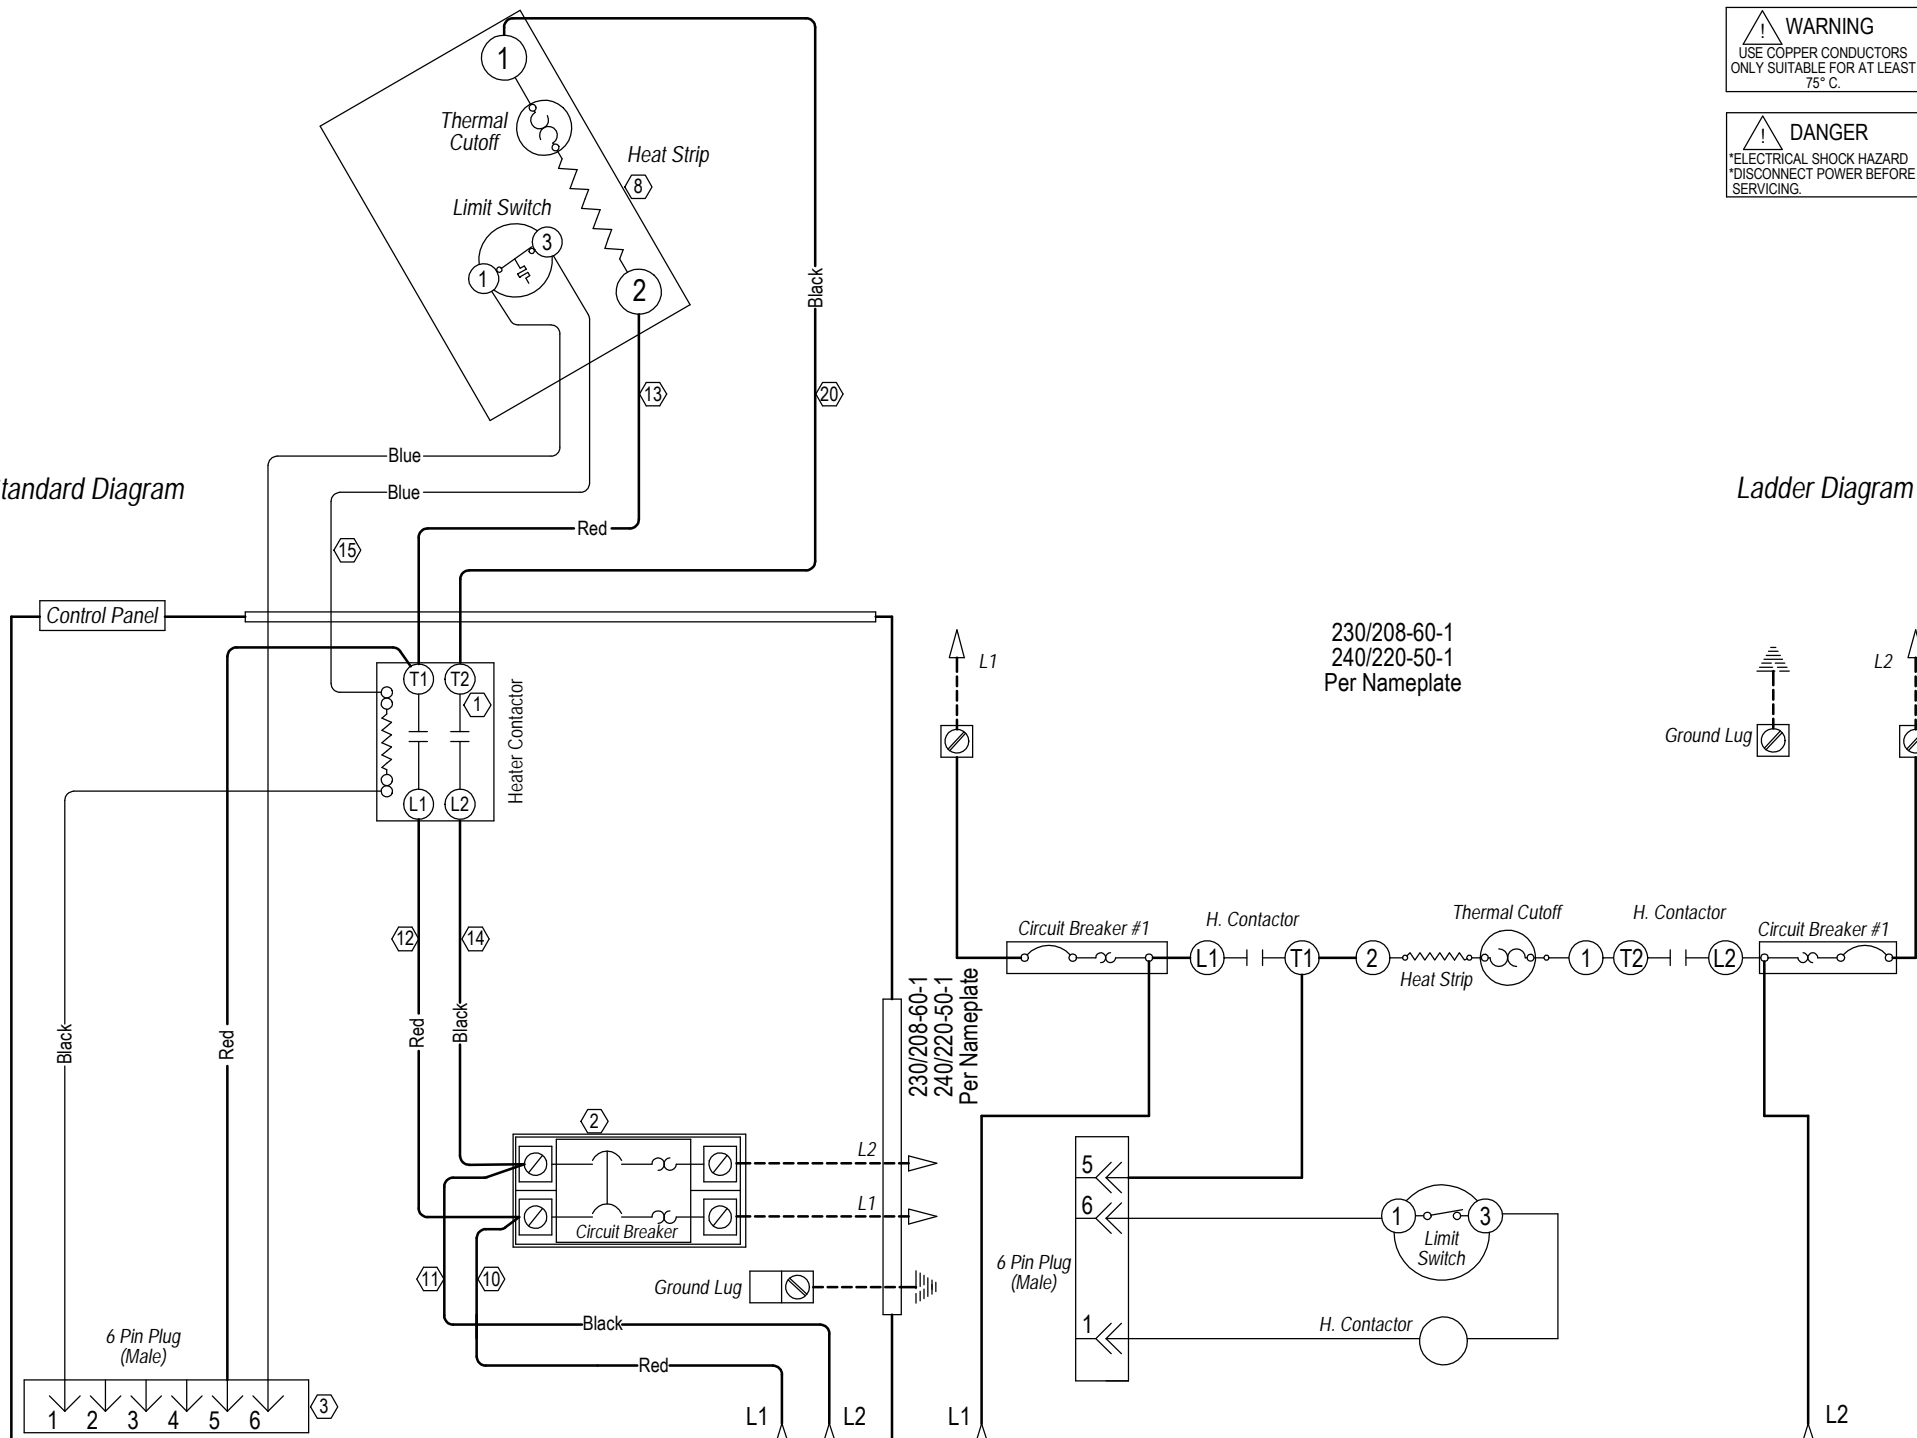

230/208-60-1
240/220-50-1
Per Nameplate

230/208-60-1
240/220-50-1
Per Nameplate

6 Pin Plug
(Male)