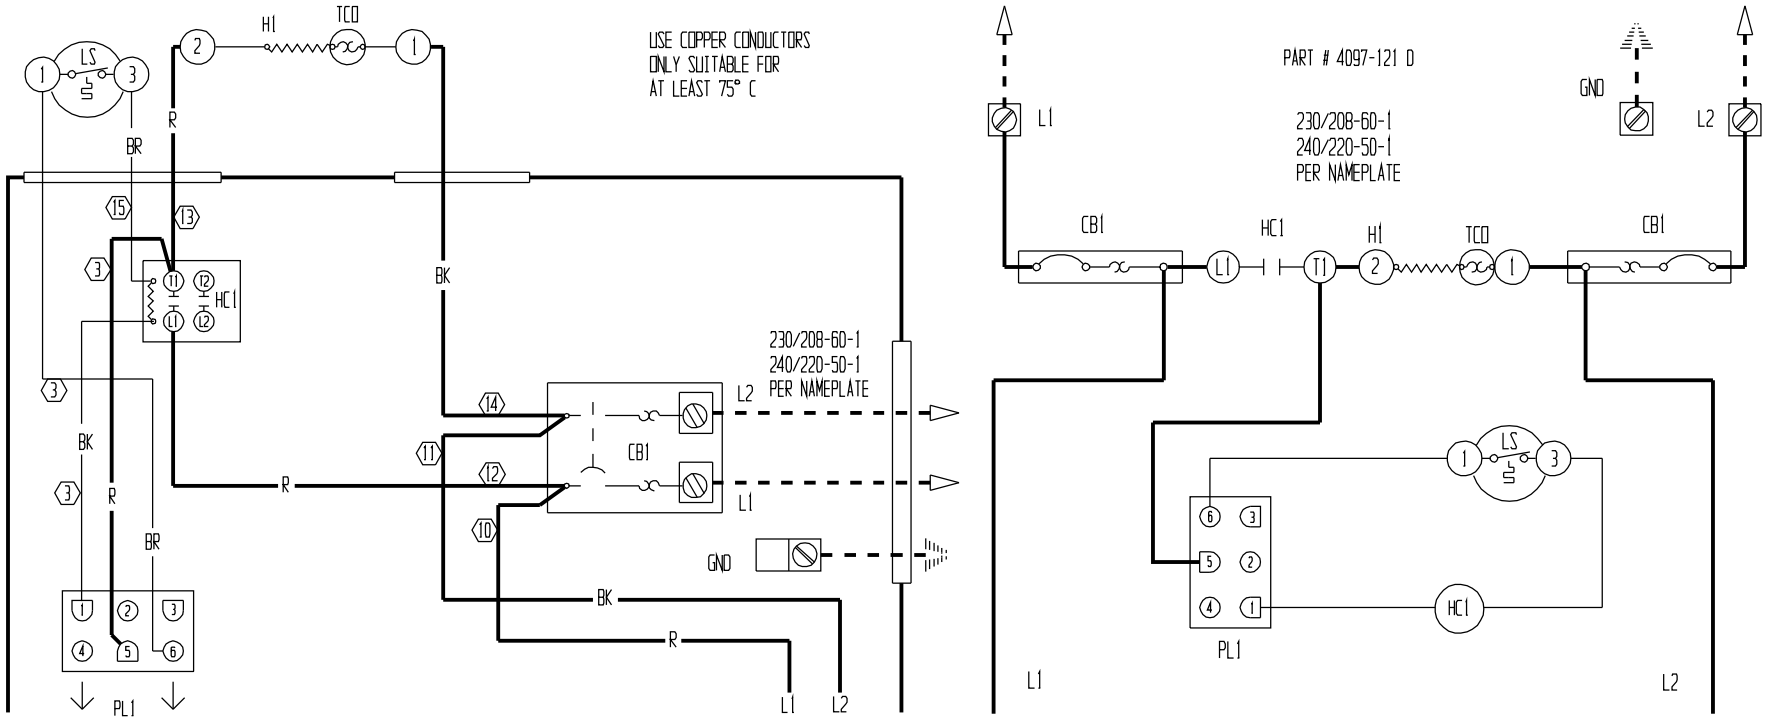
LS
H1
TCO
USE COPPER CONDUCTORS
ONLY SUITABLE FOR
AT LEAST 75° C
R
BR
BK
HC1
CB1
230/208-60-1
240/220-50-1
PER NAMEPLATE
L2
L1
GND
PL1
PART # 4097-121 D
T1