


230/208-60-1
 240/220-50-1
 PER NAMEPLATE

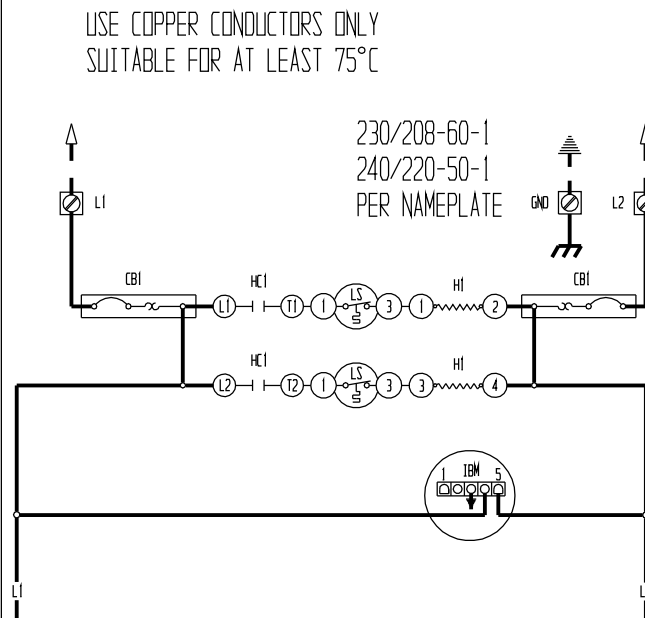

USE COPPER CONDUCTORS ONLY
 SUITABLE FOR AT LEAST 75°C

230/208-60-1
 240/220-50-1
 PER NAMEPLATE