


# 4101-124 B

**WARNING**  
USE COPPER CONDUCTORS  
ONLY SUITABLE FOR AT LEAST  
75° C.

**DANGER**  
ELECTRICAL SHOCK HAZARD  
DISCONNECT POWER BEFORE  
SERVICING.

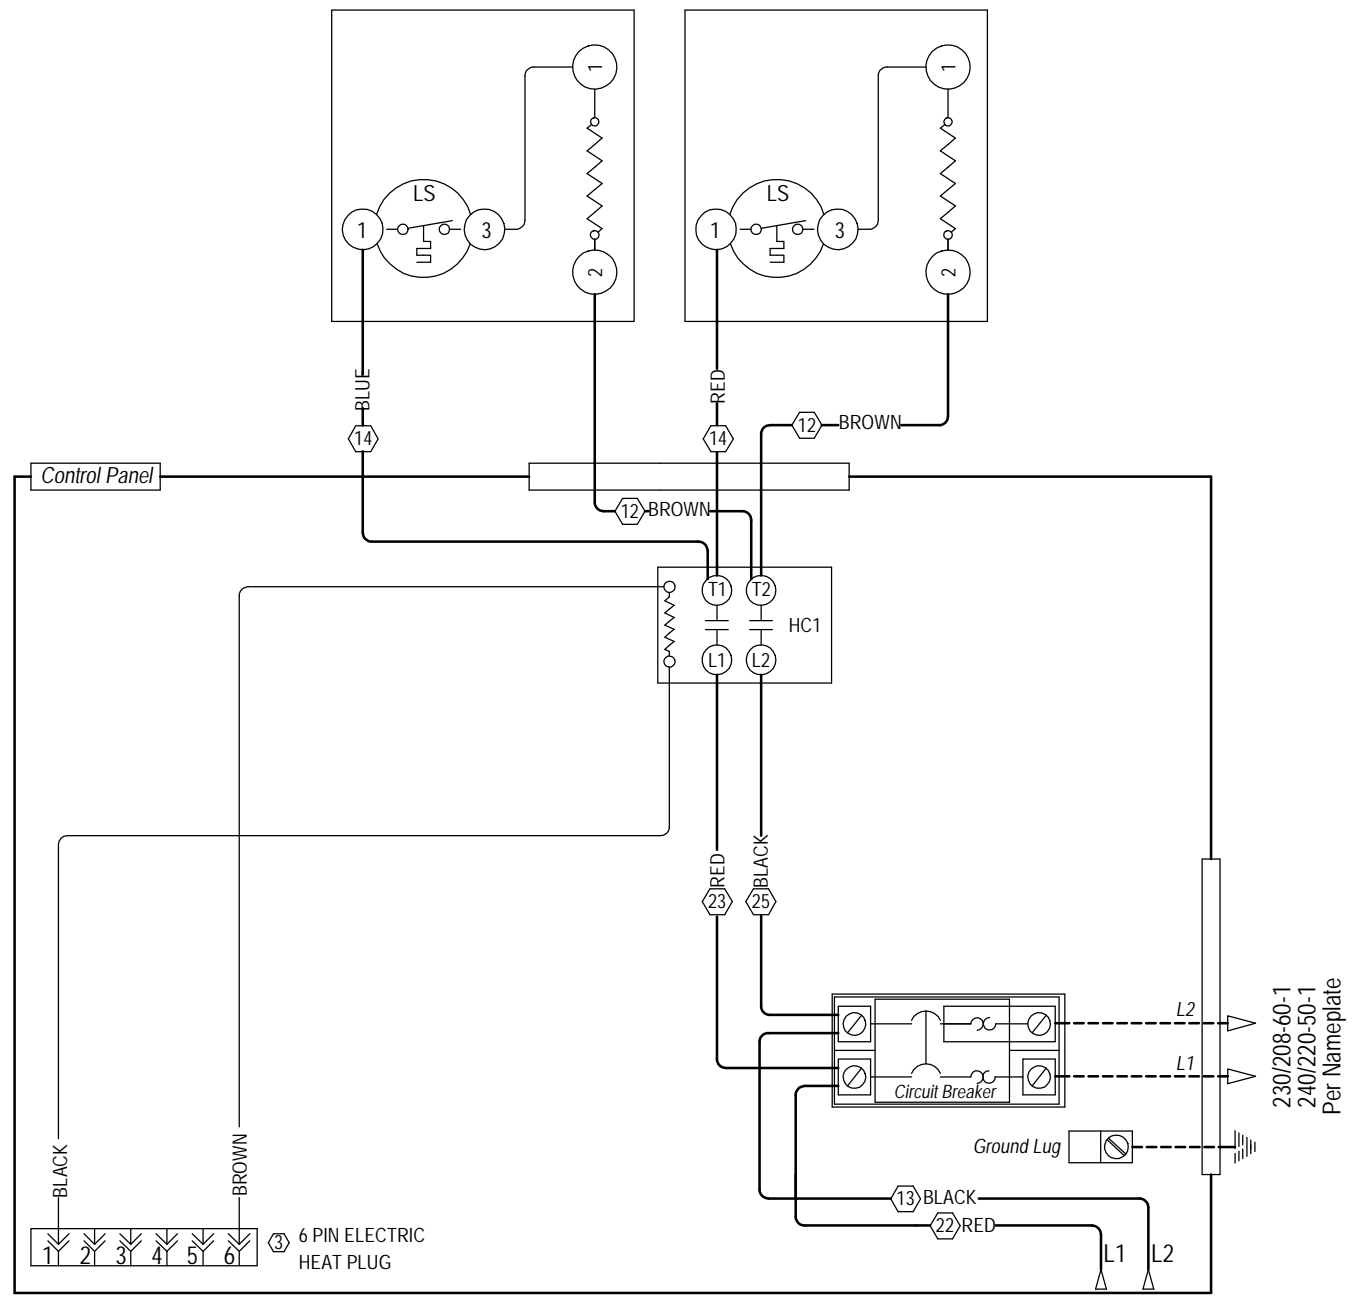

230/208-60-1  
240/220-50-1  
Per Nameplate

**6 PIN ELECTRIC  
HEAT PLUG**