
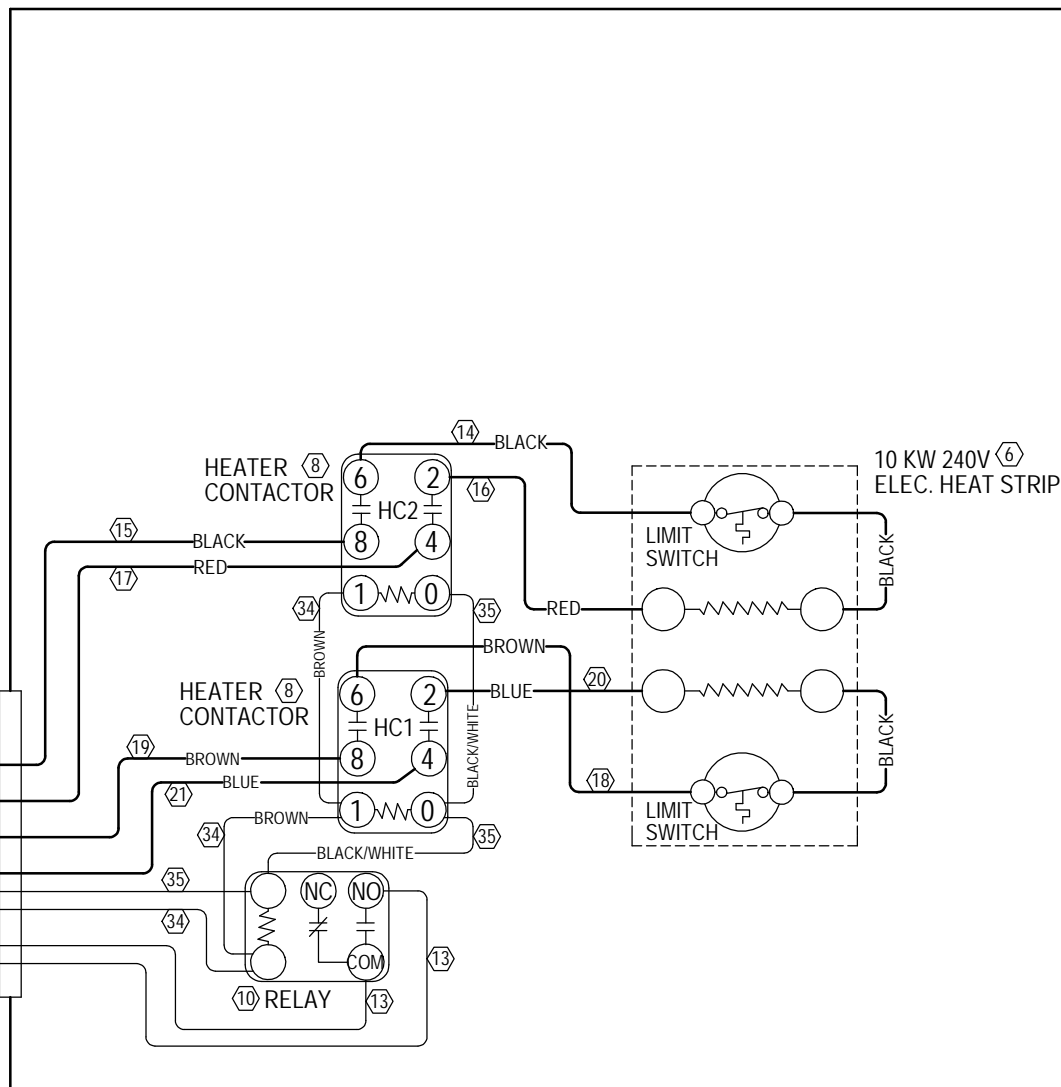
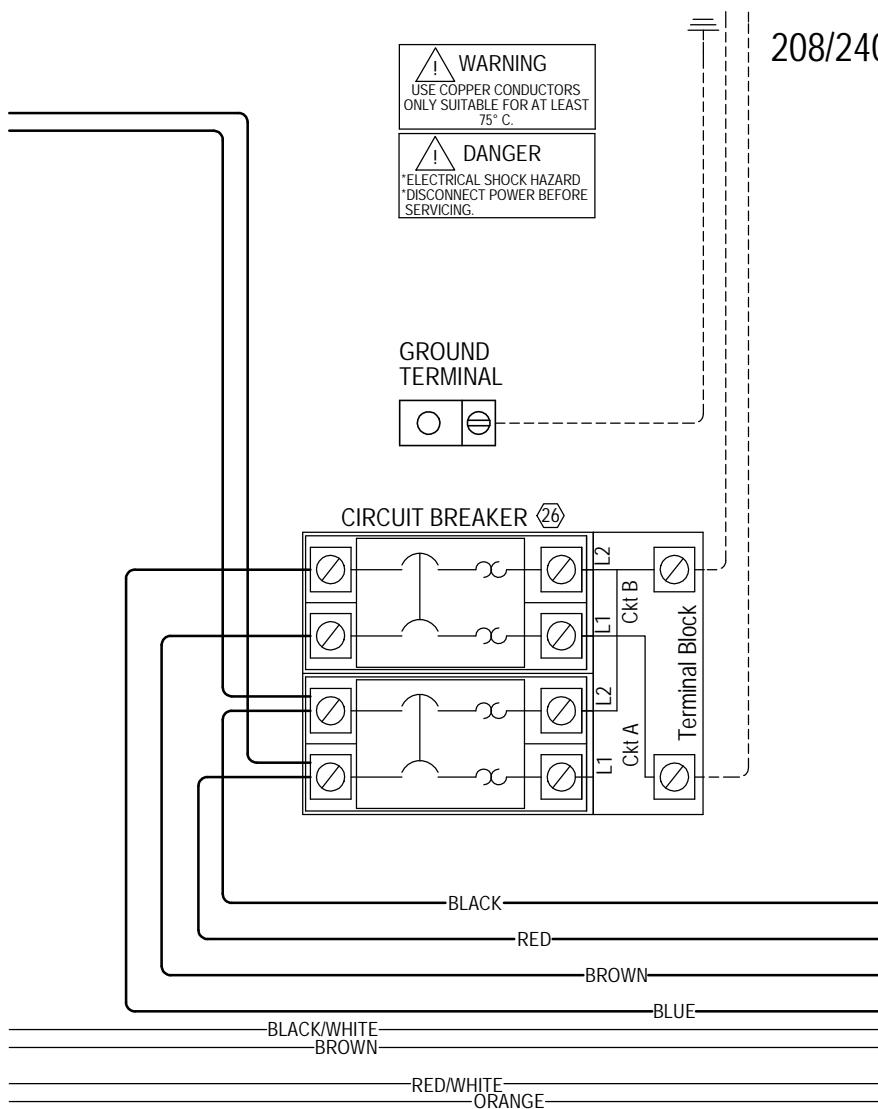


208/240-60-1 Line Power Per Nameplate

WARNING
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.

DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE
SERVICING.

GROUND
TERMINAL



10 KW 240V ELEC. HEAT STRIP

Unit Model Number	Single Circuit Breaker Size	Dual Circuit Breaker Size		Compressor Capacitor
		CKT. A	CKT. B	
I30H1-A10	80A	50A	30A	40/370
I36H1-A10	80A	40A	60A	40/370
I36Z1-A10	80A	40A	60A	40/370
I42H1-A10	90A	45A	60A	45/370
I48H1-A10	90A	45A	60A	30/370
I48Z1-A10	90A	45A	60A	30/370
I60H1-A10	100A	60A	60A	40/440
I60Z1-A10	100A	60A	60A	40/440

THIS WIRE IS TAPED-OFF IN LOW VOLTAGE TERMINAL BOX. SEE LOW VOLTAGE WIRING SECTION IN INSTALLATION MANUAL.

FOR 208 VOLT OPERATION, MOVE THIS RED WIRE TO 208 VOLT TRANSFORMER TAP

Wire Identification numbers for Bard use only.

	Factory	Field	Optional
High Voltage	_____	-----	-----
Low Voltage	_____	-----	-----