


NOTE:
 W42,48,60 - 50Hz models only:
 Motor powered with Red (low)
 lead. Black lead lands on park
 terminal.

- EVAPORATOR SECTION :**
 EEV ELECTRONIC EXPANSION VALVE
 SPT SUCTION PRESSURE TRANSDUCER
 STS SUCTION TEMPERATURE SENSOR
 FS FREEZE SENSOR
- BLOWER SECTION :**
 DFS DIRTY FILTER SWITCH
 MAT MIXED AIR TEMPERATURE
- CONTROL PANEL :**
 CCM COMPRESSOR CONTROL MODULE
 ◻ TERMINAL BLOCK
- ECONOMIZER SECTION :**
 DS DAMPER SWITCH




- CONDENSER SECTION :**
 SPT SUCTION PRESSURE TRANSDUCER
 HPS HIGH PRESSURE SWITCH
 LPS LOW PRESSURE SWITCH
 OATH OUTDOOR TEMP AND HUMIDITY SENSOR
 RAT RETURN AIR TEMP SENSOR

	Factory	Field	Optional
High Voltage			
Low Voltage			
0-10VDC			

4207-310 C

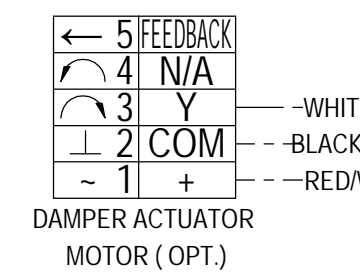




Outside Control Panel

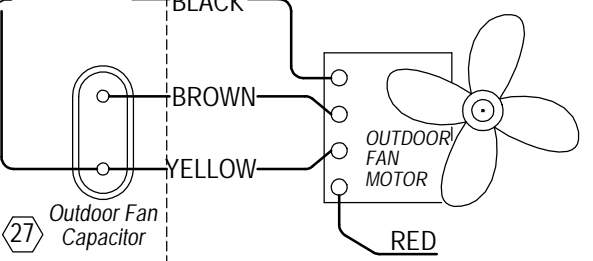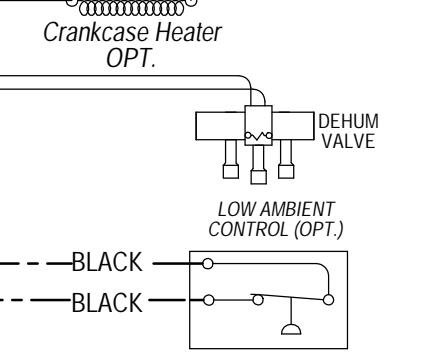

Condenser Section

Blower Power Plug

2 CONDUCTOR SHIELDED CABLE

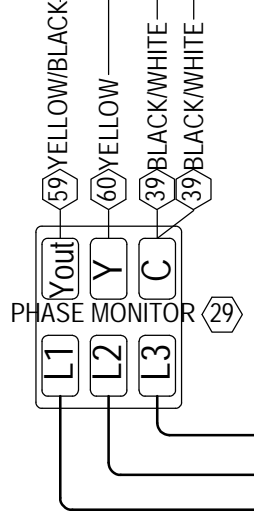

PROGRAMMABLE LOGIC CONTROL

