
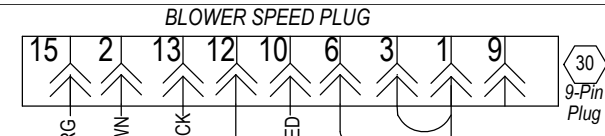



**FAN BOARD FUSE:**  
 250V 3.15A  
 5mmx20mm  
 Fast Acting, Glass



**WIRE IDENTIFICATION NUMBERS FOR BARD USE ONLY.**

	Factory	Field
High Voltage		
Low Voltage		

For Vent Wiring or controller/thermostat connections, see literature packet or go to [www.bardvac.com](http://www.bardvac.com)

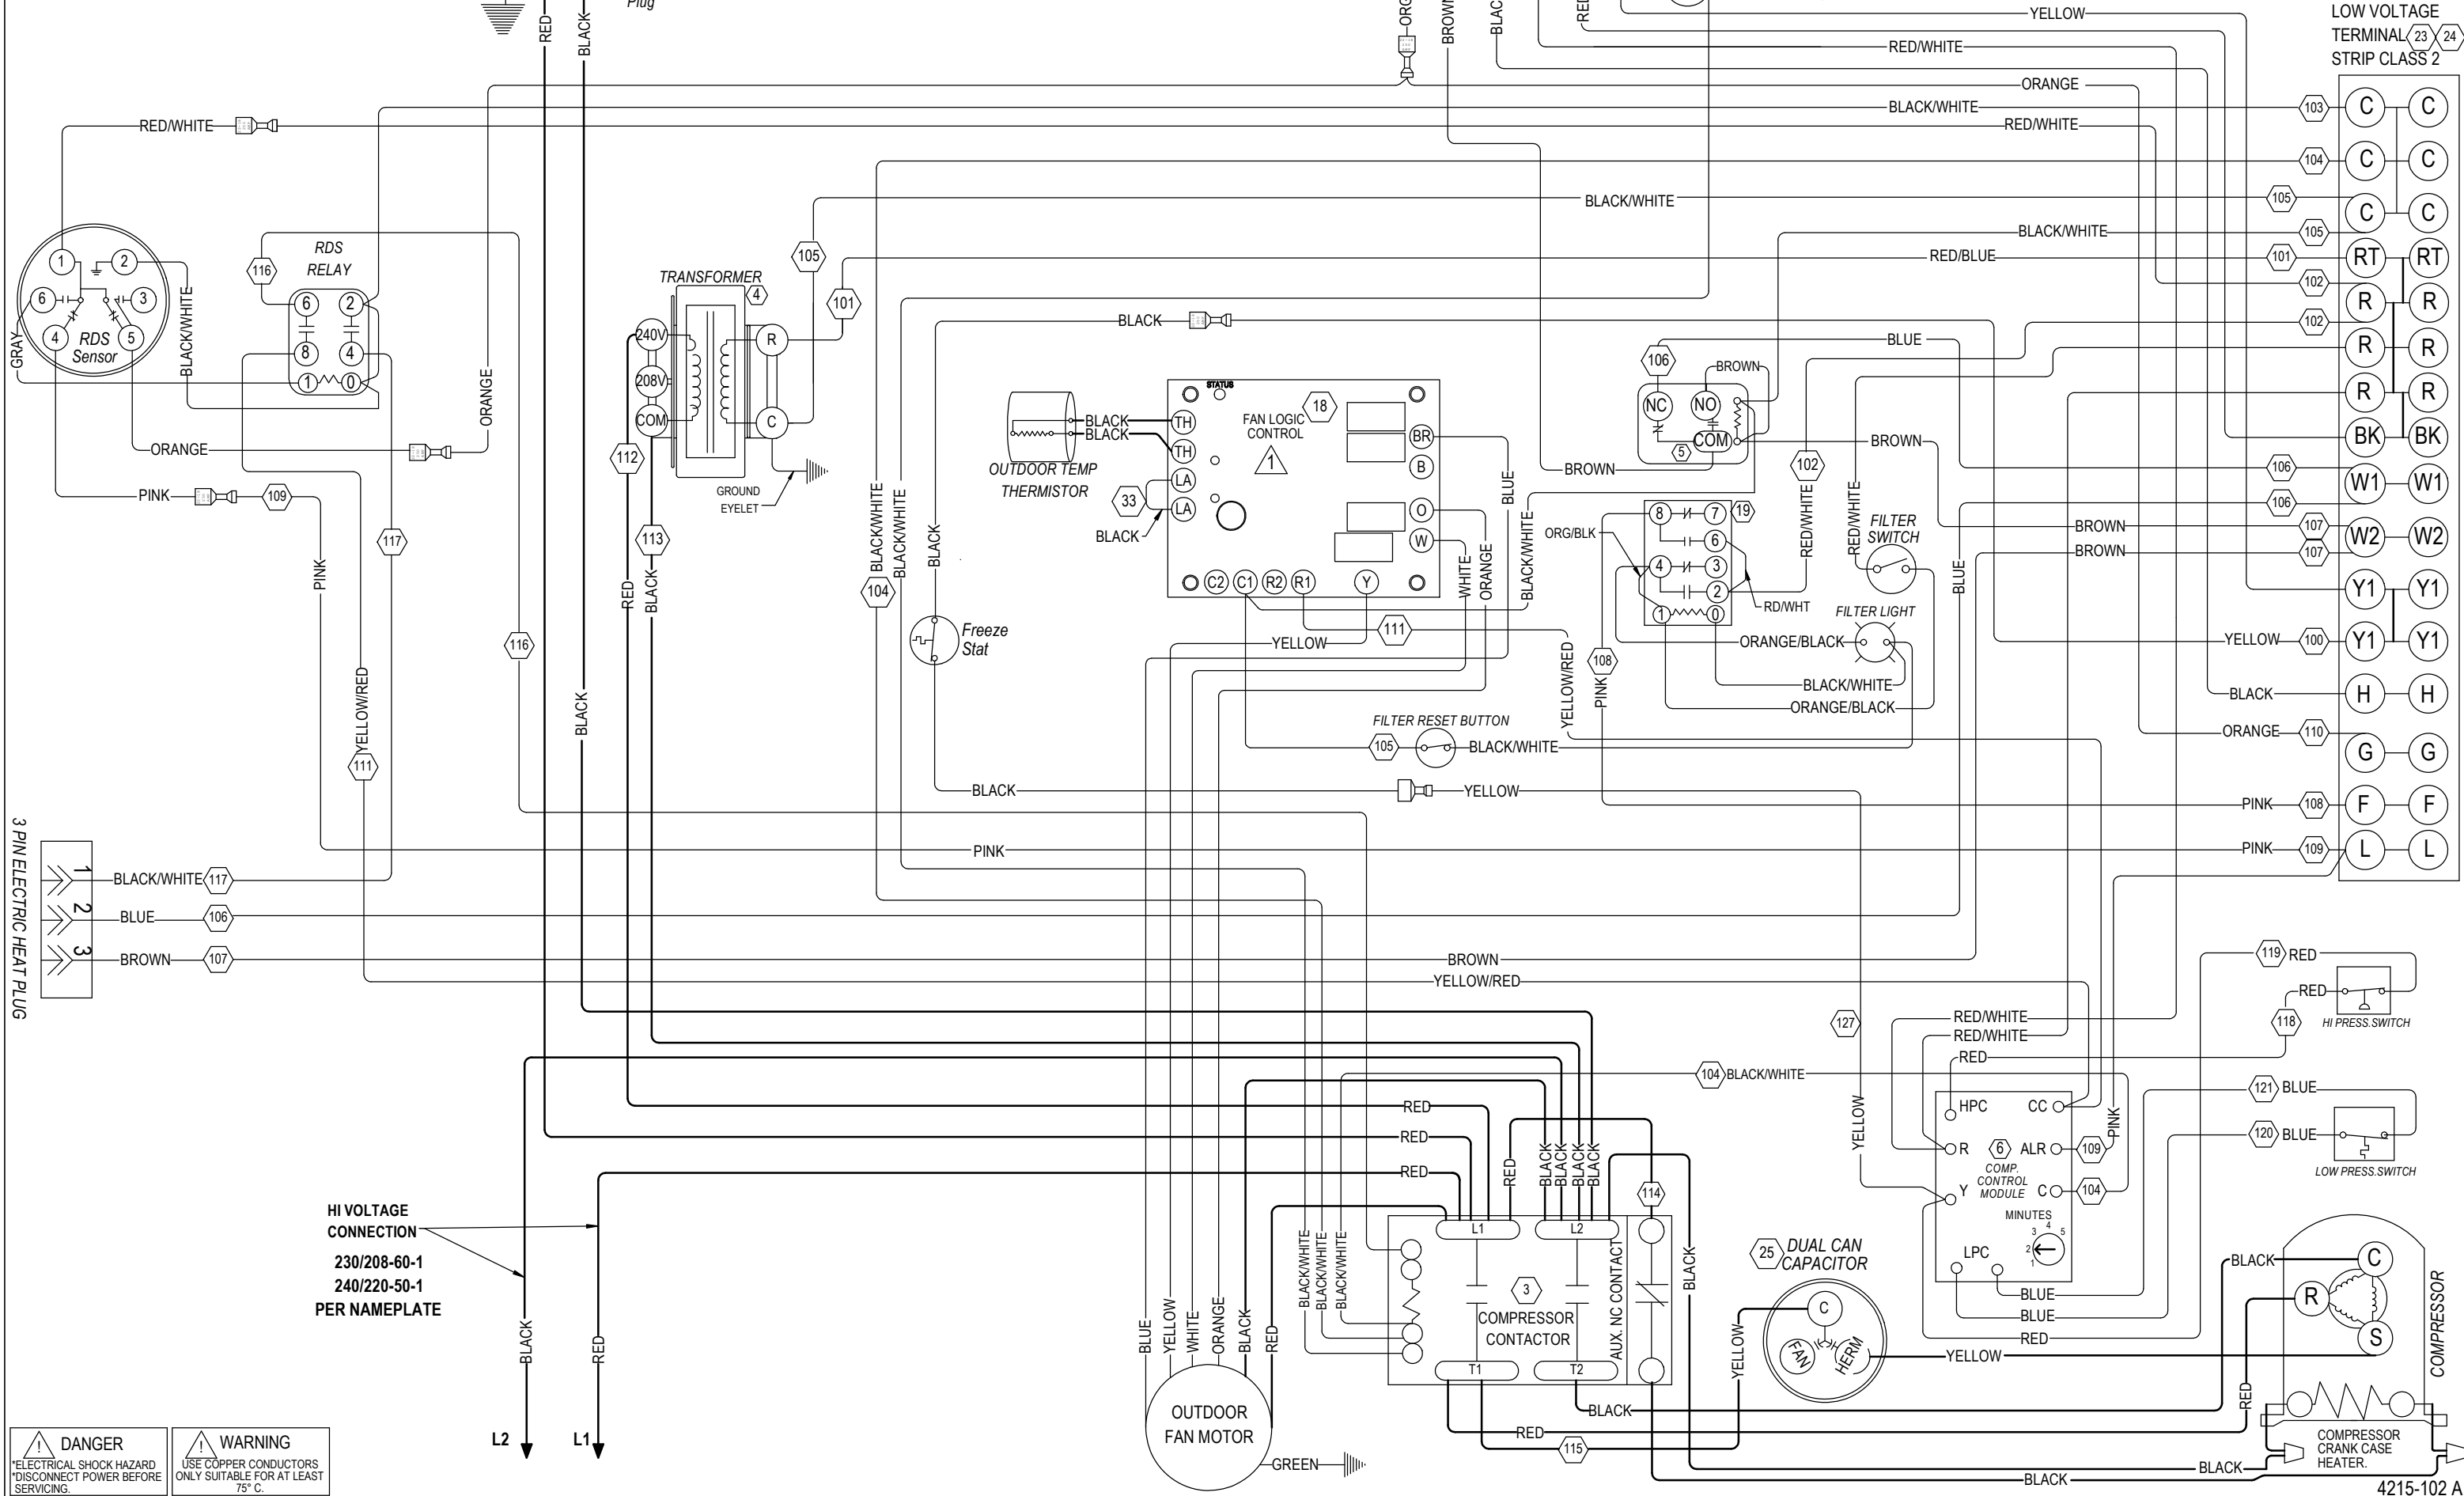

**HI VOLTAGE CONNECTION**  
 230/208-60-1  
 240/220-50-1  
 PER NAMEPLATE

L2  
 L1

**! DANGER**  
 ELECTRICAL SHOCK HAZARD  
 DISCONNECT POWER BEFORE SERVICING.

**! WARNING**  
 USE COPPER CONDUCTORS  
 ONLY SUITABLE FOR AT LEAST 75° C.