


WARNING
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.

DANGER
ELECTRICAL SHOCK HAZARD
DISCONNECT POWER BEFORE
SERVICING.

STANDARD DIAGRAM

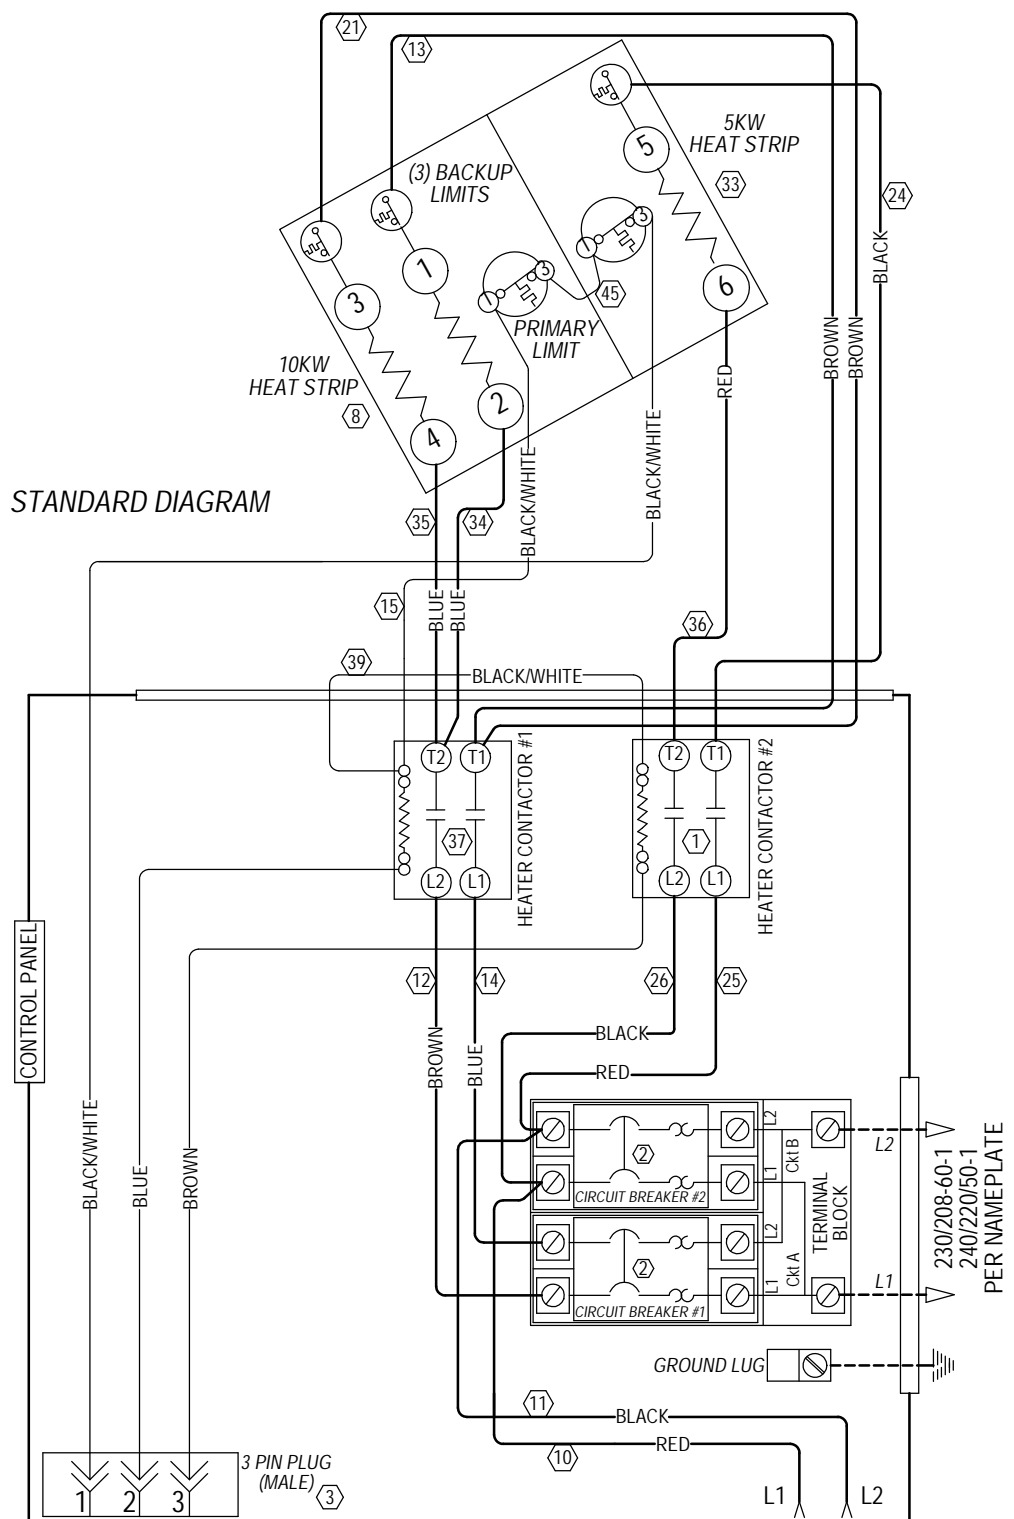

230/208-60-1
240/220/50-1
PER NAMEPLATE