


**WARNING**  
USE COPPER CONDUCTORS  
ONLY SUITABLE FOR AT LEAST  
75° C.

**DANGER**  
ELECTRICAL SHOCK HAZARD  
DISCONNECT POWER BEFORE  
SERVICING.

STANDARD DIAGRAM

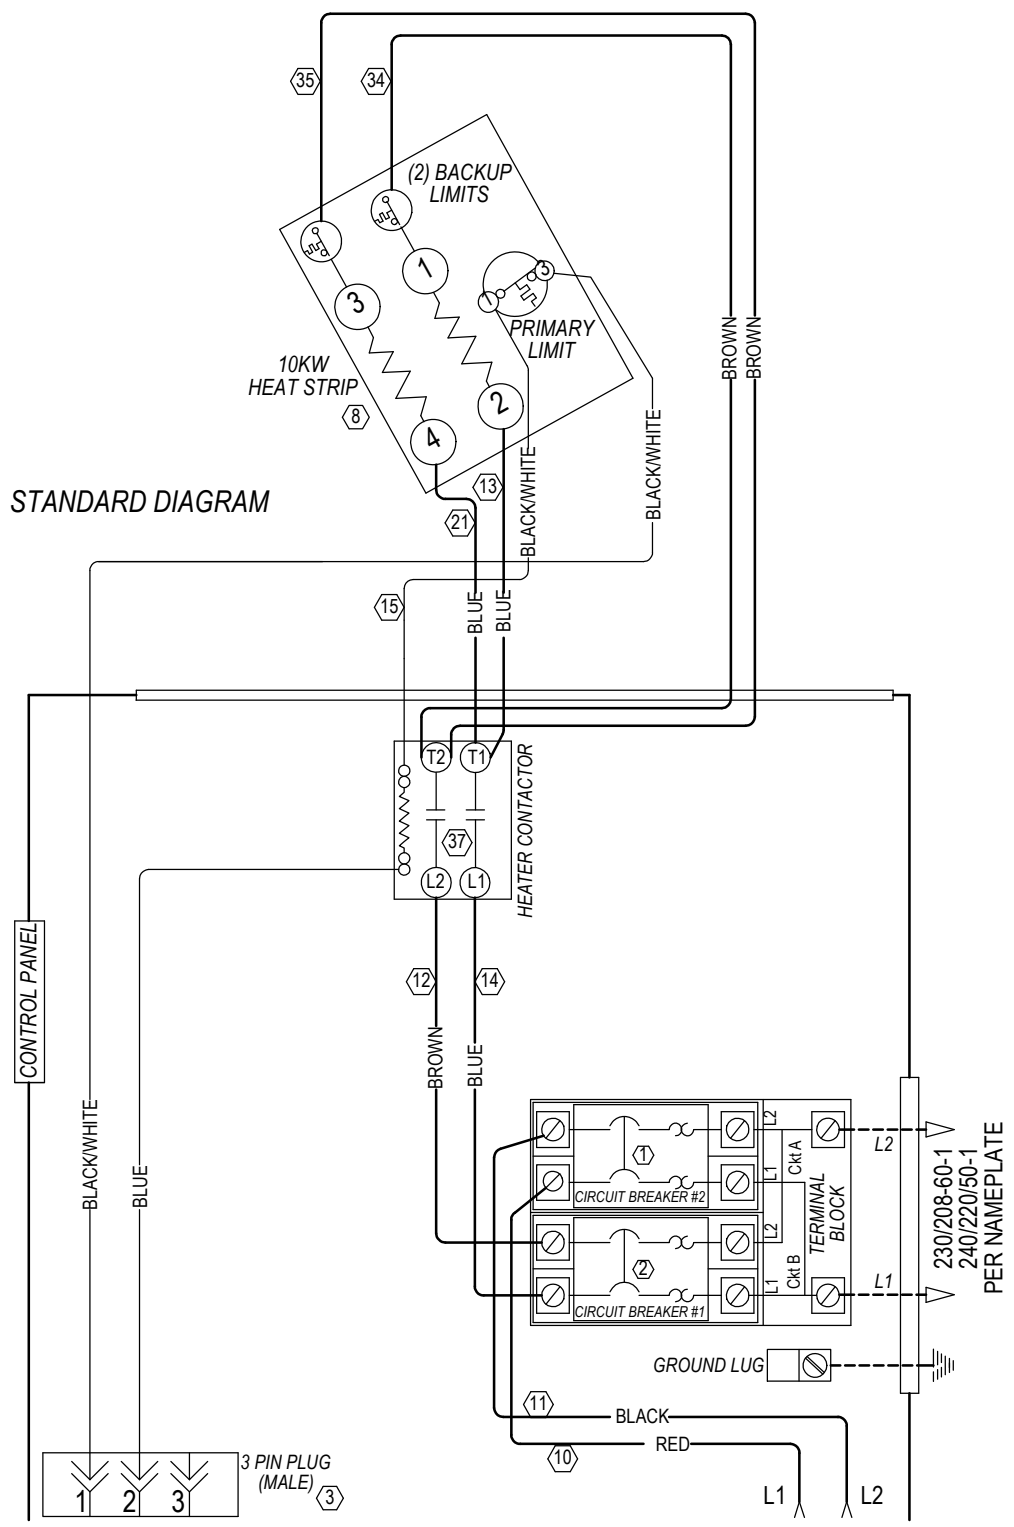

CONTROL PANEL

BLACKWHITE

BLUE

1 2 3

3 PIN PLUG (MALE)

10KW HEAT STRIP

BROWN

BLUE

CIRCUIT BREAKER #2

CIRCUIT BREAKER #1

GROUND LUG

BLACK

RED

L1

L2

HEATER CONTACTOR

BLUE

BLUE

BLACKWHITE

BLACKWHITE

BROWN

BROWN

230/208-60-1  
240/220/50-1  
PER NAMEPLATE

